


A Spectrum of Benefits ...



## Onload Changeover Switch

# ABOUT US

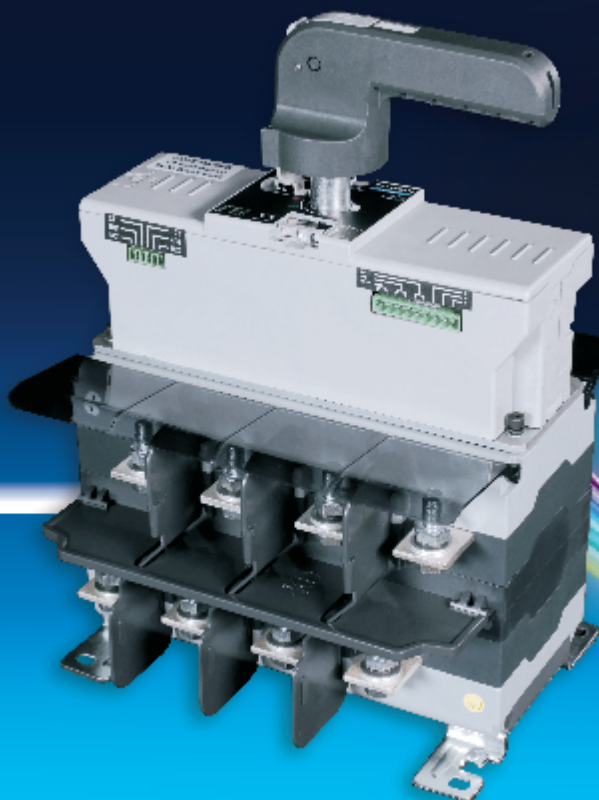

Switchgear Factory, Navi Mumbai



Switchgear Factory, Ahmednagar



Switchgear Factory, Vadodara

Larsen & Toubro is a technology-driven company that infuses engineering with imagination. The Company offers a wide range of advanced solutions in the field of Engineering, Construction, Electrical & Automation, Machinery and Information Technology.

L&T Switchgear, a part of the Electrical & Automation business, is India's largest manufacturer of low voltage switchgear, with the scale, sophistication and range to meet global benchmarks. With over seven decades of experience in this field, the Company today enjoys a leadership position in the Indian market with a growing international presence.

It offers a complete range of products including powergear, controlgear, industrial automation, building electricals & automation, reactive power management, energy meters, and protective relays. These products conform to Indian and International Standards.

# INDEX

Overview

2 - 5

Product Data

6 - 26

Wiring Diagrams

27 - 29

Characteristic Curves

30 - 33

Dimensions

34 - 52

# Standards & Approvals

## CO range of Changeover Switches comply with the following standards



- **IEC 60947-1, EN 60947-1, IS/IEC 60947-1**  
Low-voltage switchgear and controlgear, Part 1: General Rules
- **IEC 60947-3, EN 60947-3, IS/IEC 60947-3**  
Low-voltage switchgear and controlgear, Part 3: Switches, disconnectors, switch-disconnectors and fuse combination units

Third party certificates (ERDA / CPRI) available for CO range of changeover switches

### NABL



NABL accreditation is a formal recognition of the technical competence of testing, calibration or medical laboratory for a specific task following ISO/IEC 17025:2005 Standard. Accredited laboratories have the responsibility of satisfying the criteria of laboratory accreditation at all times, which are verified during Surveillance and Reassessment visits by NABL. Further the accredited laboratories should prove their technical competence by satisfactory participation in recognized Proficiency Testing Programmes.

L&T's Switchgear Testing Lab is NABL accredited subject to continued satisfactory compliance to above standard & additional requirements of NABL.

The CO range of Changeover switches are tested in L&T's NABL accredited Switchgear Testing Lab.

### CE Marking



A CE marking is a European marking of conformity that indicates a product complies with the essential requirements of the applicable European laws or directives with respect to safety, health and environment and consumer protection. Generally, this conformity to the applicable directives is done through self-declaration and is required on products in the countries of the European Economic Area (EEA) to facilitate trade among the member countries. The manufacturer or their authorized representative established in the EEA is responsible for affixing the CE marking to their product. The CE marking provides a means for a manufacturer to demonstrate that a product complies with a common set of laws required by all countries in the EEA to allow free movement of trade within the EEA countries.

L&T's CO range of Changeover switches conform to the Low voltage directive 73/23/EEC as amended by directive 93/68/EEC, provided it is used in the application for which it is made and is installed and maintained in accordance with professional practices with relevant installation standards and operating instructions.

### RoHS Compliance



As a green initiatives, Larsen & Toubro understands the requirements of the RoHS directive. The directive restricts the use of hazardous substances in electrical and electronic equipment and bans electrical equipment containing more than permitted levels of lead, cadmium, mercury, hexavalent chromium, polybrominated biphenyl (PBS) and polybrominated diphenyl ether (PBDE) flame retardants.






## Overview

---

- Basic Function ..... 03
- Superior Performance ..... 04
- Product Range ..... 05

# Changeover Switches

L&T offers you a unique series of Changeover Switches combining compactness with high performance & customer convenience, thus, making it a state-of-the-art product in changeover technology. The CO range covers ratings from 63 A to 2000 A in 6 frame sizes. These changeover switches are available in open execution, Sheet steel enclosure, fused version (suitable for DIN type fuse - link), motorised version & Enclosed ATS version.

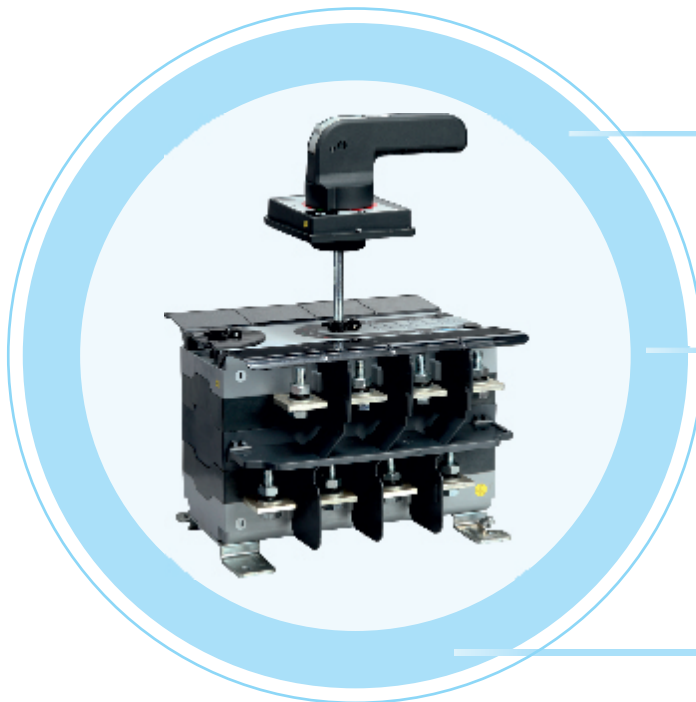

SS Enclosure inclusive of cable gland box



Field-convertible fuse changeover switch



Motorised changeover switch

## Basic function of Changeover Switches

Onload Changeover S-D has 3 stable positions as defined below

### POSITION I

Switch is in ON position with normal supply available at the outgoing terminals.

### POSITION O

Switch is in OFF position & outgoing terminals are isolated from both supplies (normal & alternate supplies)

### POSITION II

Switch is in ON position with alternate supply available at the outgoing terminals.

Onload Changeover S-D consists of two separate sets of terminals for incoming supplies and a set of output terminals to connect the common load. Thus, changeover switch ensures continuity of supply to the load by alternating between normal and alternate supply.

# Superior Performance

## Higher short-time withstand Capacity

Contact system is of double break, knife type having self wiping action with electrodynamic compensation. This ensures reliable performance during normal as well as short circuit fault conditions, offering higher short-time withstand rating.

## Higher life

Changeover switch offers high electrical and mechanical life in compact frame sizes. The electrical and mechanical life are two times the requirement of the standard.

## Total flexibility of connection

Factory fitted external shorting links can be easily removed and fitted on the other side as required at site (125 A to 2000 A). This gives more flexibility at the time of installation. For Frame 1(63A, 100A & 125A), CAT no.s for top and bottom shorting links are available.

## Maximum termination capacity

Changeover Switch provides generous terminal capacity in its compact size, facilitating aluminium termination.

## Higher ground clearance

Higher ground clearance between terminals and mounting base plate ensures adequate clearance even after connecting cables. This eliminates the possibility of phase to ground flash over.

## Total safety

Changeover Switch provides complete safety by providing terminal shrouds, source separator and inter-phase barriers.

# Product Range

Onload Changeover S-Ds are available from 63 A to 2000 A. The range is covered through 6 frames as shown below.

Frame No.	Ratings (A)		
I	63	100	125
II	125	160	200
III	250	315	
IV	400	630	
V	630	800	1000
VI	1250	1600	2000

## Versions

Changeover Switches are available in open execution, Sheet steel enclosure, fused version and motorised version.



### Changeover S-D suitable for open execution

Changeover S-D, which can be commissioned in panels are of open execution type and provide IP20 protection from front.



### Onload changeover S-D in SS enclosures

Onload Changeover S-Ds are available in sheet steel enclosure with adequate space for cable terminations so that additional cable entry boxes are not required.

Cable gland plates are also provided with the switch. Enclosure provides IP54 protection.



### Changeover S-D suitable for HRC fuses

The Changeover S-Ds for open execution can be easily converted to fused version at site by using fuse conversion kit. It provides the benefits of overload and short circuit protection through the fastest switching device-fuse, and is suitable for cylindrical & knife type (DIN) fuse links. Use of L&T HF & HN fuse links reduces watt loss.



### Motorised Changeover S-D

On load changeover S-Ds are available in motorised version with control voltage 240 V ac. There is no difference in product dimensions of manual and motorised changeover S-Ds (125 A to 2000 A).






## Product Data

---

■ Manual Changeover Product Feature .....	07
■ Technical Specifications of Manual Changeover .....	11
■ Motorised Changeover Product Features .....	13
■ Universal Mounting for Manual Changeover Range .....	15
■ Automatic Source Transfer Solution.....	16
■ ASTS with AST Controller .....	17
■ ASTS with AuXC 2000 Controller .....	19
■ Technical Specifications of Motorised Kit .....	21
■ Enclosed ATS .....	23
■ Ordering Information .....	26



# Manual Changeover Product Feature

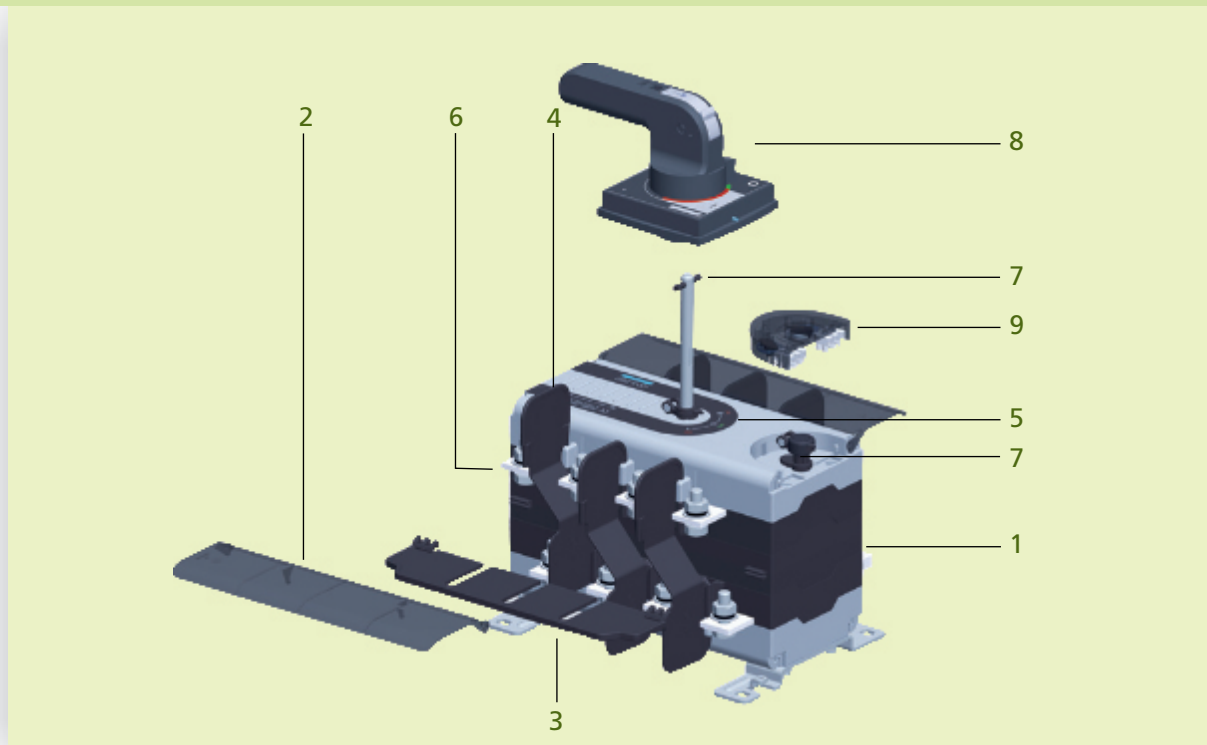

## 1. Mechanism

A single, compact and modular mechanism cassette operates two Switch-Disconnectors and provides mechanical interlocking between them.

The use of patented, self interlocked and dual dead center mechanism in CO range provides higher reliability for changeover function.

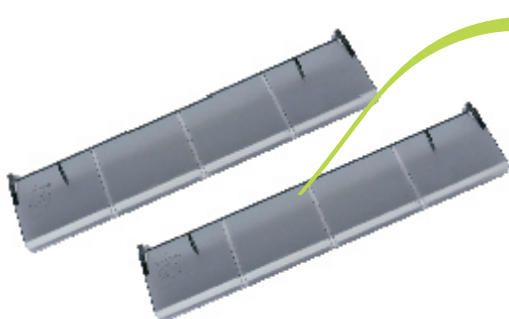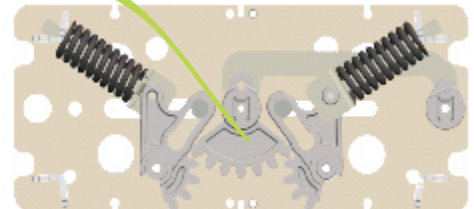


## 2. Terminal shroud


These shrouds provide complete touch proof design and prevent accidental touching of live terminals. They are click fit type. Due to hinge type terminal shrouds, it can be turned by 90 degree, hence terminals can be inspected without removing these shrouds.

## 3. Source separator

Source separator is used to isolate two incoming supplies and to eliminate possibility of flash over between two supplies due to accidental falling of external objects.

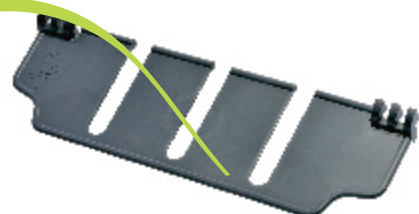

# Manual Changeover Product Feature

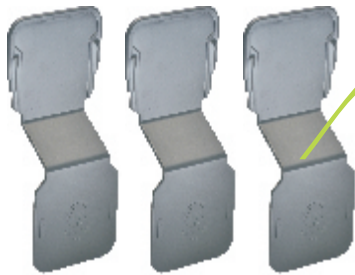


## 4. Inter-phase barriers

Inter-phase barriers are provided for additional safety to eliminate possibility of inter-phase short-circuit.

## 5. Positive ON / OFF indication of S-Ds

The Changeover S-D indicates true position of contacts.

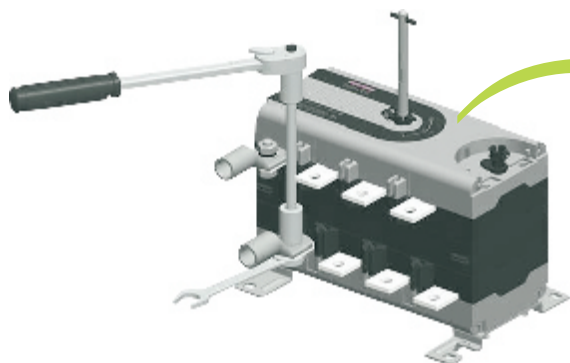


## 6. Staggered terminals

The Changeover S-Ds are designed to have staggered terminal arrangement for top and bottom S-Ds. It provides clear access to all terminals from the front, ensuring ease of termination.

All terminal joints can be easily inspected without the need of removing termination of top S-D.

## 7. Interchangeable dual shaft position with site convertibility

Patented dual dead enter mechanism enables the user to choose between central and side shaft positions for operating handle. This can be easily converted on site as required (125A to 1000A).

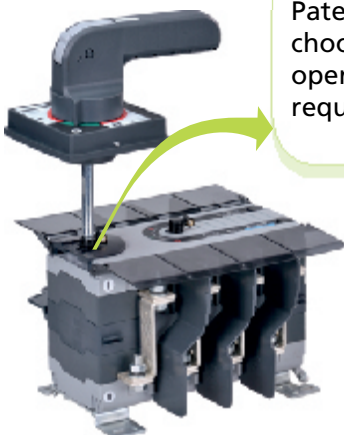


# Manual Changeover Product Feature


## 8. Handle

The Changeover Switch has a unique flip-able operating handle for ratings 250 Amp and above which enables user to operate the switch with two hands. The handle also offers the following features:


- Provision for Padlocking in OFF position with three Padlocks of Ø5 to Ø7
- Defeat feature in both ON states and auto restoration of panel door
- IP54 with extended type operating handle

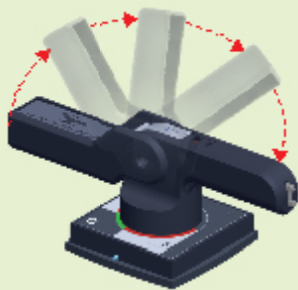


Two hand type flip-able handle  
250 A & above rating



One hand type handle  
upto 200 A rating

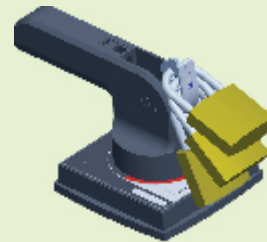

Changeover unit  
padlockable in OFF state by 3 pad locks

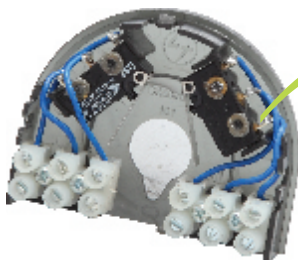

## 9. Auxiliary contact kit

It consists of two sets changeover contacts one for each S-D. This kit is pre-wired with terminal blocks and is offered as a standard feature with open execution Manual Changeover Switches.

## 10. Castell lock

Accessory to lock the Changeover Switch in OFF state and using this can have interlocking schemes between multiple Switches.



## Sheet steel enclosure


The Changeover Switches are available in sheet steel enclosure with adequate space for cable terminations so that additional cable entry boxes are not required.



# Manual Changeover Product Feature


## Changeover Switch with Direct Handle

Compact direct handle 63 A and 100 A changeover switch suitable for double door DB. It occupies only 10 Mod space (45 x 140 cut-out).

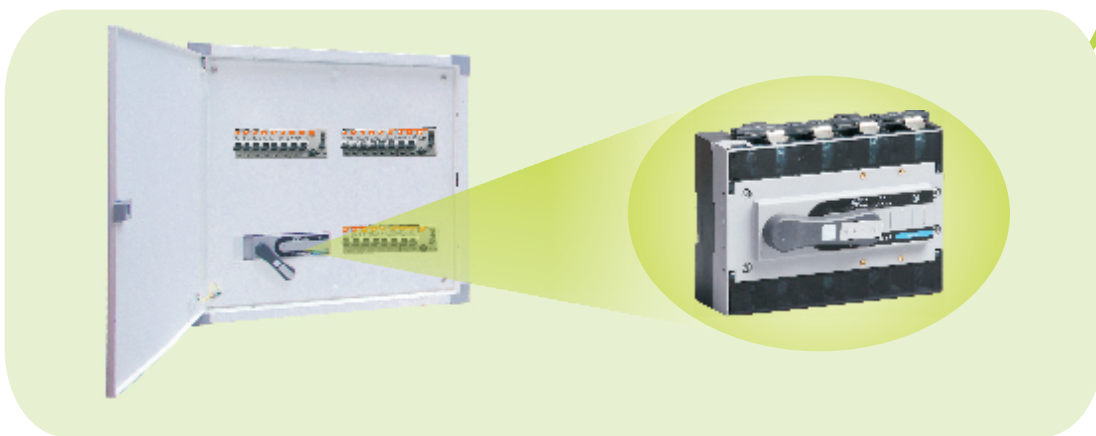

## Fuse Changeover Switch

The Changeover S-Ds for open execution can be easily converted to fused version at site by using fuse conversion kit. It can be used either to protect against one supply (line) or protect the load side (no load line biasing). It provides the benefits of overload and short circuit protection through the fastest switching device-fuse, and is suitable for cylindrical & knife type (DIN) fuse links.

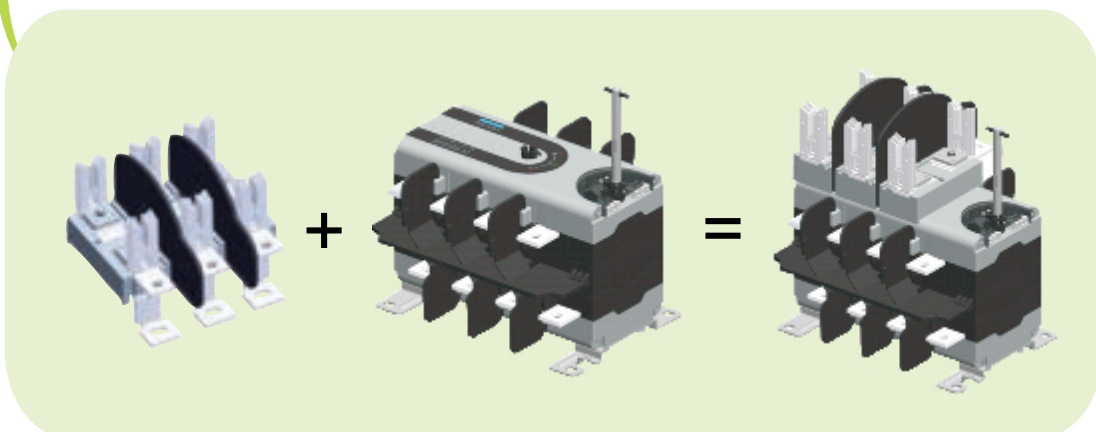

# Technical Specifications of Manual Changeover



			Frame 1			Frame 2	
Rating (A)		Unit	63 A	100 A	125 A	125 A	160 A
Reference Standards							
Type designation			CO1-63	CO1-100	CO1-125	CO2-125	CO2-160
No. of Poles			4 Pole	4 Pole	4 Pole	4 Pole	4 Pole
Rated operational voltage (U <sub>e</sub> )		(V)	415	415	415	415	415
Rated frequency		(Hz)	50 / 60	50 / 60	50 / 60	50 / 60	50 / 60
Rated insulation voltage (U <sub>i</sub> )		(V)	1000	1000	1000	1000	1000
Rated impulse withstand voltage (U <sub>imp</sub> )		(kV)	8	8	8	12	12
Pollution degree			3	3	3	3	3
Conventional free air thermal current, I <sub>th</sub> at 40°C		(A)	63	100	125	125	160
Conventional enclosed thermal current, I <sub>the</sub> at 40°C		(A)	63	100	125	125	160
Rated operational current, I <sub>e</sub> AC-21A <sup>#</sup> / AC-22A <sup>#</sup> / AC-23A		(A)	63	100	125	125	160
Rated operational power for AC-23A*		(kW)	37	50	65	65	85
Rated breaking capacity for AC-23A		(A)	504	800	1000	1000	1280
Rated making capacity for AC-23A		(A)	630	1000	1250	1250	1600
Short time withstand, I <sub>cw</sub>	1 sec	(kA rms)	4	5	5	8	8
	0.2 sec	(kA rms)	7	10	10	18	18
Short-circuit making capacity, I <sub>cm</sub>		(kA peak)	5.9	7.7	7.7	14	14
Endurance (category A)	Mechanical	(O-I-O-II-O cycle)	20000	20000	20000	16000	16000
	Electrical	(O-I-O-II-O cycle)	3000	3000	2000	2000	2000
Type and size of fuse	DIN/Cylin▲		14 x 51▲	NA	NA	000	00
Rated fused short-circuit current at 415 V, 50/60 Hz	DIN/Cylin▲	(kA rms)	80▲			100	100
Termination Capacity							
Maximum Al. cable with lug		(sq mm)	25	50	70	95	95
Maximum link width		(mm)	16	22	22	30	30
Maximum link thickness		(mm)	2	4.7	4.7	5	5
Termination tightening torque		(N-m)	4.5	4.5	4.5	10	10
Operating torque center / side operating		(N-m)	4.5	4.5	4.5	10 / 13	10 / 13
Weight (without accessories)		(Kg)	2	2.5	2.7	4	4

\* These values are for 4 pole squirrel cage induction motors and are provided only for guidance and may vary as per the motor manufacturer

<sup>#</sup> Rated operational current, I<sub>e</sub> AC-21A / AC-22A


<sup>▲</sup> Type cylindrical fuse

<sup>§</sup> Claimed Impulse withstand voltage with use of source separator and inter phase barriers





	Frame 3		Frame 4		Frame 5			Frame 6		
200 A <sup>s</sup>	250 A	315 A	400 A	630 A	630 A	800 A	1000 A	1250 A	1600 A	2000 A
IS / IEC 60947-3, EN 60947-3										
CO2-200	CO3-250	CO3-315	CO4-400	CO4-630	CO5-630	CO5-800	CO5-1000	CO6-1250	CO6-1600	CO6-2000
4 Pole	4 Pole	4 Pole	4 Pole	4 Pole	4 Pole	4 Pole	4 Pole	4 Pole	4 Pole	4 Pole
415	415	415	415	415	415	415	415	415	415	415
50 / 60	50 / 60	50 / 60	50 / 60	50 / 60	50 / 60	50 / 60	50 / 60	50 / 60	50 / 60	50 / 60
1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000
12 <sup>s</sup>	12	12	12	12	12	12	12	12	12	12
3	3	3	3	3	3	3	3	3	3	3
200	250	315	400	630	630	800	1000	1250	1600	2000
200	250	315	400	630	630	800	1000	1250	1600	2000
200	250	315	400	630	630	800	1000	1250	1600 <sup>#</sup> /1250	2000 <sup>#</sup> /1250
85	132	160	225	315	315	400	450	710	710	710
1600	2000	2520	3200	5040	5040	6400	8000	10000	10000	10000
2000	2500	3150	4000	6300	6300	8000	10000	12500	12500	12500
8	16	18	22	26	35	50	50	50	50	50
18	28	28	35	35	70	85	85	85	85	85
14	32	36	46	55	73.5	105	105	105	105	105
16000	16000	16000	10000	10000	10000	10000	10000	10000	10000	10000
2000	2000	2000	2000	2000	2000	1000	1000	1000	1000	500
NA	1	1	2	NA	3	3	NA	NA	NA	NA
	100	100	100		100	100				
150	185	240	2 x 300	2 x 300	2 x 400	2 x 400	2 x 400	2 x 12 x 63	4 x 8 x 50	3 x 10 x 100
30	40	40	50	50	60	60	60	80	80	100
5	8	8	8	2 x 8	2 x 10	2 x 10	2 x 10	3 x 12	3 x 12	3 x 12
10	20	20	27	27	35	35	35	55	55	55
10 / 13	20 / 25	20 / 25	28 / 32	28 / 32	30 / 40	30 / 40	30 / 40	55	55	55
4	6.5	7	14	14.5	20	22	22	52	57	75

# Motorised Changeover Product Features

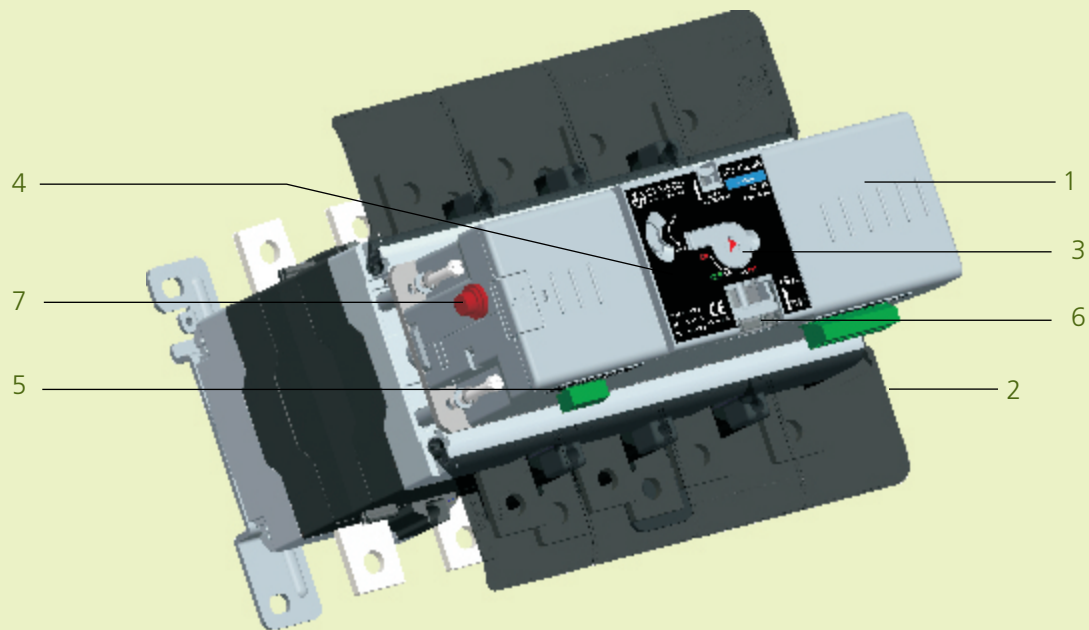

## 1. Compact design

No change in H x W x D of motorised changeover switch and manual changeover switch.

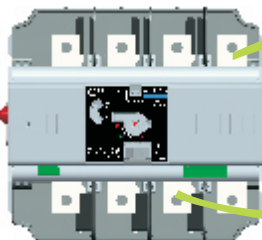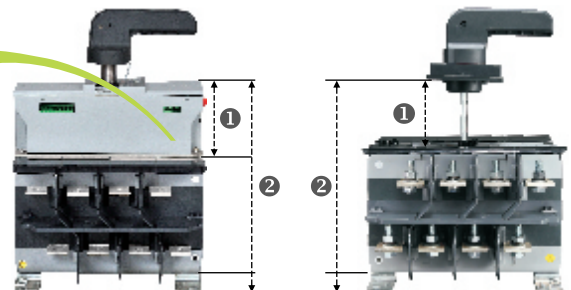

## 2. Clear termination access

Motorised kit (EOM) fits well within the body of the manual changeover switch, enabling clear access to the terminals even after mounting the motorised kit.

## 3. Manual override

Manual operation of motorised changeover switch is also feasible through the manual override feature.

As a safety feature, the control supply of motorised kit (EOM) is automatically cut off during the insertion of handle.







# Motorised Changeover Product Features

## 4. Manual and Auto mode selection

The selector switch enables/disables the control supply to motorised changeover switch. Electrical operation is possible only in auto mode while manual mode allows the user to operate the motorised changeover switch manually by using the handle safely. As a safety feature the control supply of motorised changeover is automatically cut off during the insertion of handle.

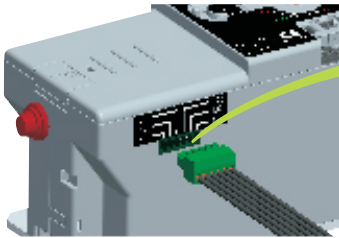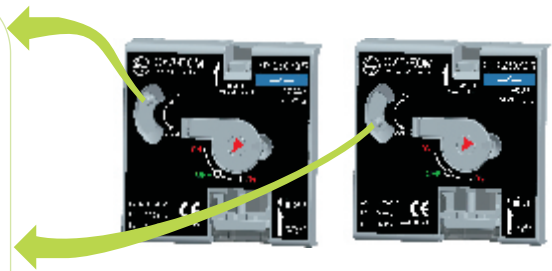


## 5. Auxiliary contacts

It consists of two sets of changeover contacts one for each S-D. It is prewired and prefitted in motorised changeover switch.

## 6. Pad locking

Provision for padlocking in OFF position with three padlocks of Ø5 to Ø7. Padlocking is possible in both auto and manual mode.

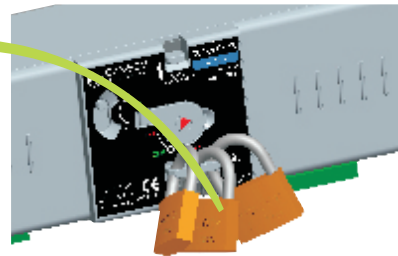





















## 7. Fuse protection

Inbuilt glass fuse of 5 x 20 size protects the motorised kit (EOM) during abnormalities. Also, spare fuse holder has been provided for storage of fuse.


# Universal Mounting for Manual Changeover Range

The manual changeover range also offers a distinctive feature to mount CO SD in different quadrants. This feature aids mounting flexibility.

## Operating Quadrant chart (Seen from front of the door)

Sr. No.	Operating Quadrant	Handle (OFF) Position	Switch Orientation	Shaft Position	Door Cut-out
1					
2					
3					
4					

# Automatic Source Transfer System

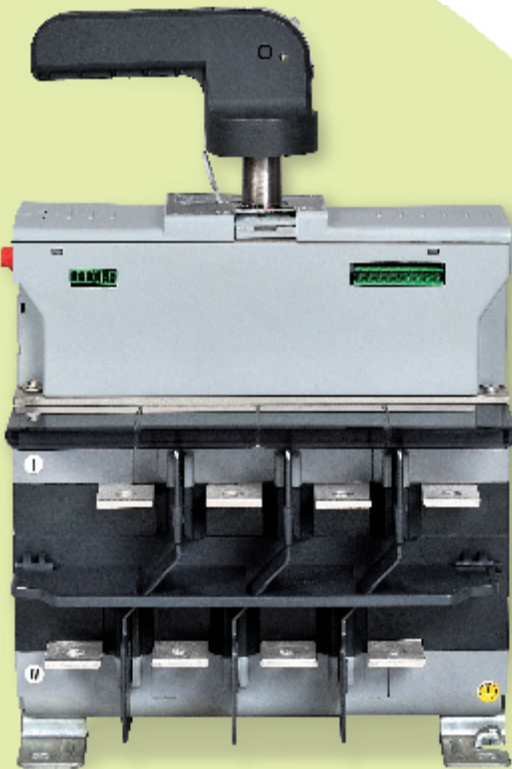

**Illuminated Push button assembly with Wire harness**



## **UV/OV based AST Controller with Wire Harness**



- Option of controlling Motorised Changeover through Illuminated push button or UV/OV relay
- Sensing of three-phase voltage controls
- Protects against under voltage and over voltage
- Option of programming of minimum voltage, maximum voltage and time delay



## **AuxC-2000 Controller with Wire Harness**

- Option of sensing : Three-phase, two-phase or single-phase voltage controls
- Option of Measuring : Phase-phase voltage and/or phase-neutral voltage control
- Protects against under voltage, over voltage, phase loss, asymmetry, under frequency, over frequency, with independent enable and delay voltage thresholds with programmable hysteresis
- 6 programmable digital inputs & relay outputs (5NO + 1 C/O)

# ASTS with AST Controller

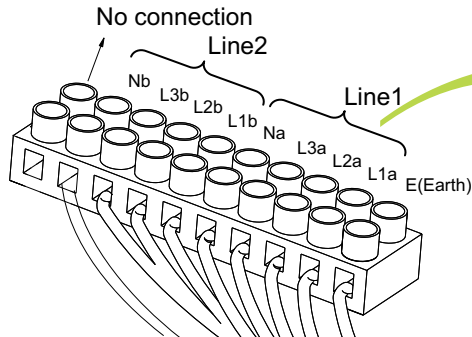
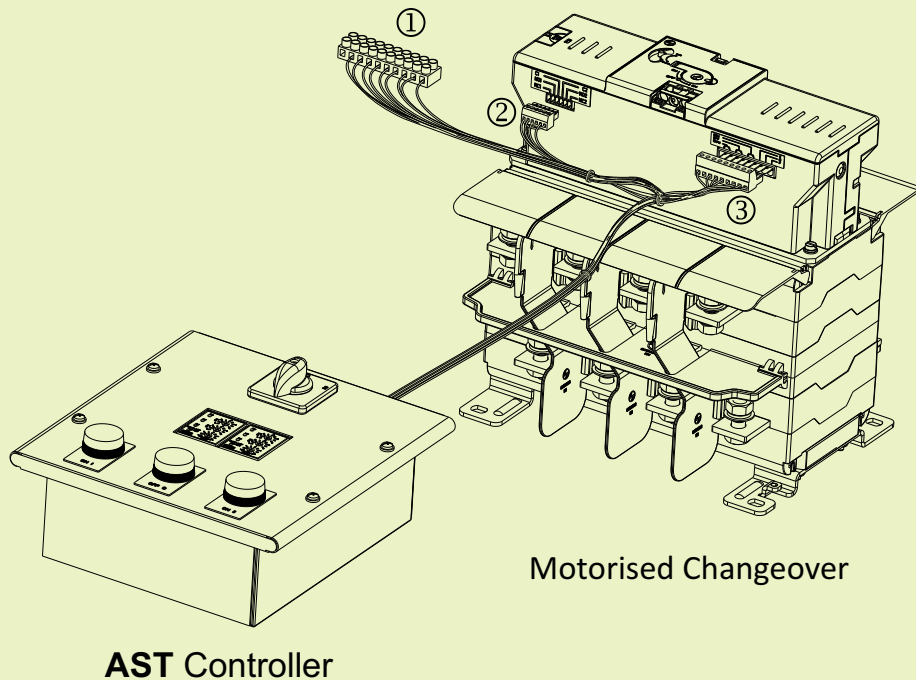


## 1. Control supply terminal block

Source I & II sensing inputs are to be connected for continuous monitoring by AST controller.

## 2. Auxiliary contact Set connection


Two sets of pre-wired changeover auxiliary contacts one for each S-D. Same is used for power contact position feedback & status indication

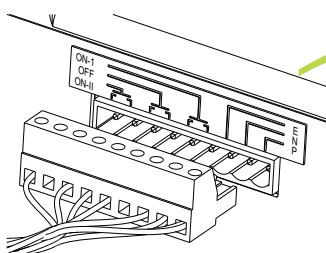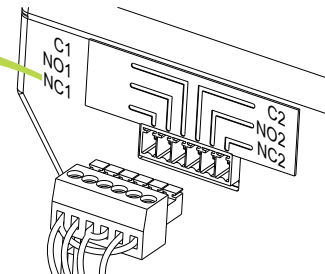

## 3. Main terminal connection

Control inputs to motorised changeover through AST controller



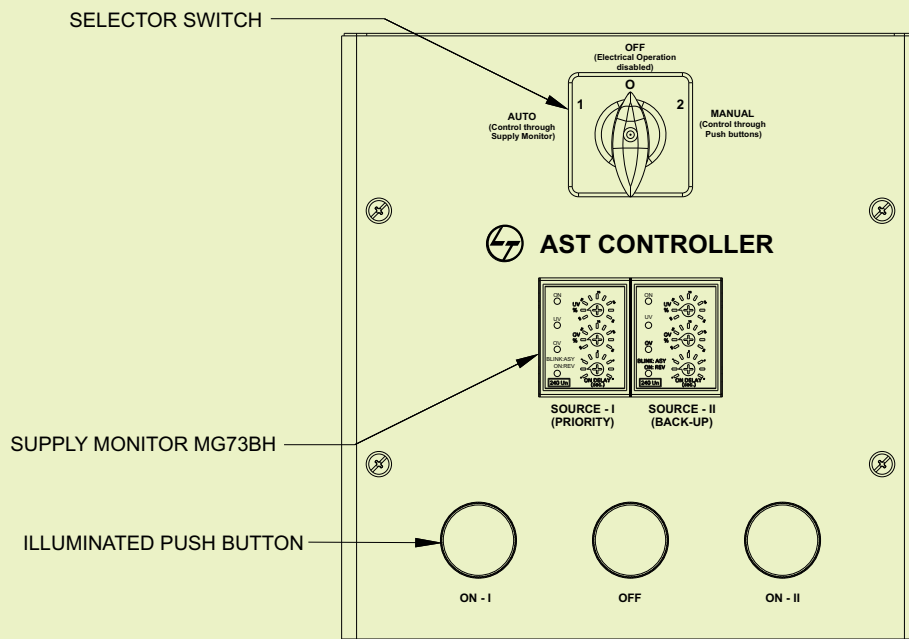

**User Interface**

## Auto Mode

In auto mode Source-I (priority source) is continuously monitored, in case of Source-I failure AST controller checks for Source-II (back-up source). If it is available then AST controller gives command to motorised changeover to shift on Source-II.

On restoration of Source-I (priority source) motorised changeover moves back to it.

Illumination in the push buttons will be functional indication of the the motorised changeover switch position.

Option of setting over voltage : Recommended setting 110% of the supply voltage

Option of setting under voltage : Recommended setting 85% of the supply voltage

Option of setting time delay : 0 -15 seconds


## Manual Mode (Electrical)

Control of motorised changeover switch using illuminated push buttons.

## Manual Mode (Operating handle)

Manual control using operating handle, as a safety feature the control supply of motorised changeover is automatically cut off during the insertion of handle.

# ASTS with AuXC 2000 Controller

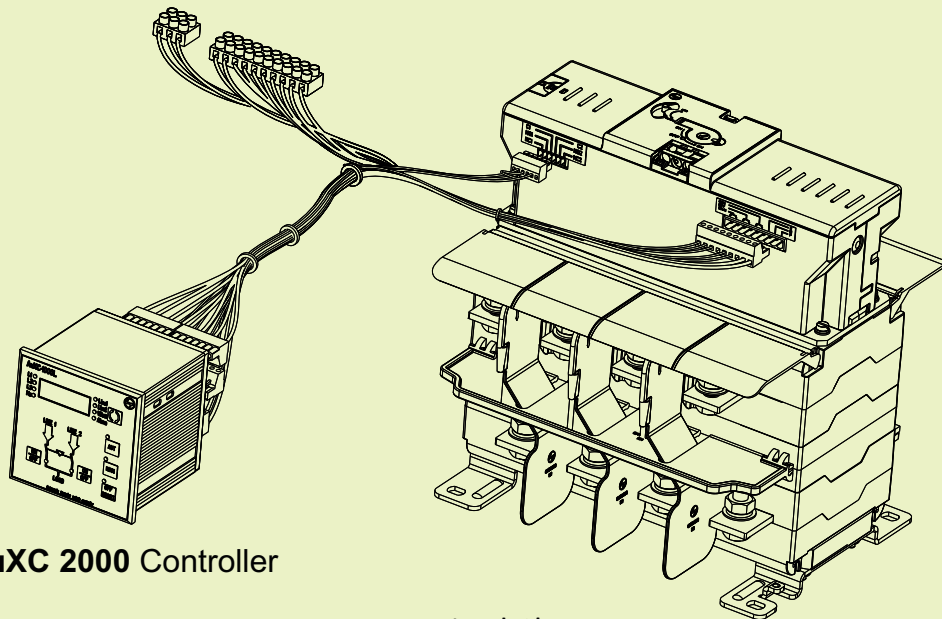

## Modes of Operation:

### OFF Mode:

In this mode, the automatic control is disabled and the controller does not take any action. All views of the measures and the status of the LEDs remain active.

To access the programming/settings menu, it is mandatory to operate in OFF mode.

Pressing the OFF-RESET button resets the retentive alarms, provided the conditions that generated the alarm have been removed.



### Manual Mode:

In this mode, the MCO can be manually controlled by the pressing the MAN key.

Closing/opening operation can be achieved by :


- Selecting the switch position
- Pressing the ▲ and ▼ buttons, for a minimum time of 300ms, to confirm the closing or opening operation

The generators can also be controlled manually by moving on the page start/stop groups.

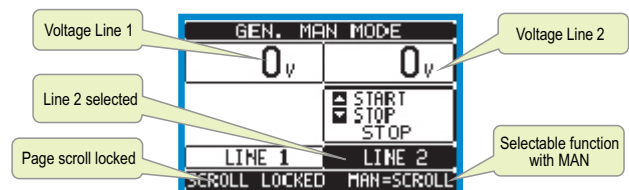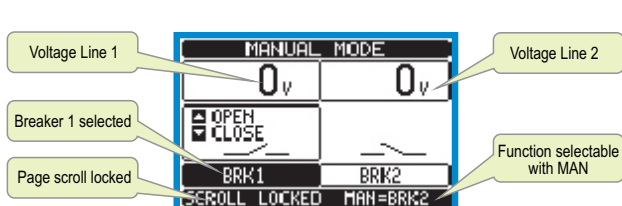


# AuxC-2000 Controller

## Front buttons functions

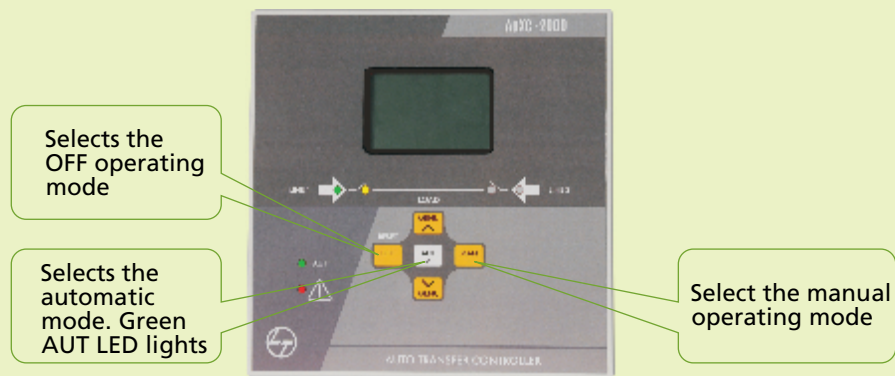

and **←** keys - Used to scroll through the display pages or to select the list of options in a menu. Simultaneously pressing **←** + **→** calls up the Main menu with rotating icons

## Front LED

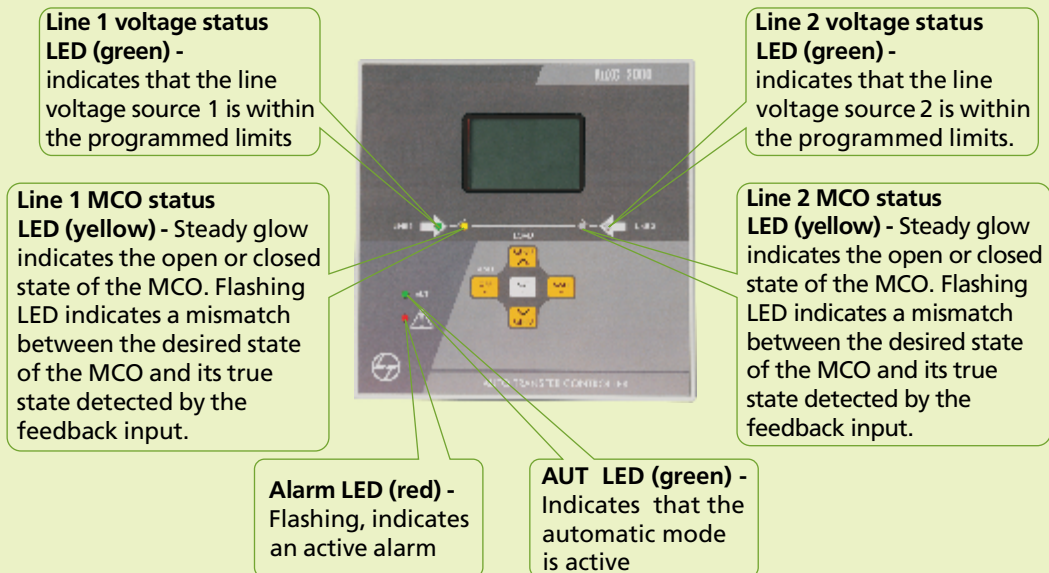

## Auto Mode:

The AUT mode is indicated by the green LED for AUT. In automatic mode, the controller automatically gives command for opening & closing of the MCO. When the priority line voltage is out of bounds for a time longer than that specified (line presence green LED turns off), the unit disconnects the load from the priority line and connects it to secondary line considering start-up of generator (if programmed) and interlock time delay. When the priority line returns within the programmed limits, the controller will switch back the load on it.

The cycles of automatic operation vary according to the type of application (utility-utility, utility-generator, generator-generator).

## Other Benefits & Features in Auto Mode

- Protection against UV, OV, phase loss, asymmetry, under frequency and over frequency
- 6 programmable digital inputs & relay outputs (5NO + 1C/O)
- Measuring and sensing of system variables
- DG set start/stop control
- Priority source swap

# Technical Specifications of Motorised Kit



			Frame 2
Rating (A)		Unit	125 to 200
Reference Standards			
Rated frequency		(Hz)	50
Rated control voltage		(V)	240 V ac
Control voltage range		(%)	85% - 110%
Pollution degree			3
Operating temperature		(°C)	-5 to + 55
Ingress protection (from front)			IP30
Max. current at 240 V ac		(A)	2
Operating time (min)	O-I / I-O	(sec)	0.5
	I-II / II-I	(sec)	1.4
Black out time		(sec)	1.4
Control glass fuse current rating	(240 V ac)	(A)	1.25
Dimensions of motorised kit	Width	(mm)	210
	Height	(mm)	84
	Depth	(mm)	94



Frame 3	Frame 4	Frame 5	Frame 6
250 & 315	400 & 630	630 to 1000	1250 to 2000
IS/IEC 60947-3, IEC 60947- 3, EN60947-3			
50	50	50	50
240 V ac	240 V ac	240 V ac	240 V ac
85% - 110%	85% - 110%	85% - 110%	85% - 110%
3	3	3	3
-5 to + 55	-5 to + 55	-5 to + 55	-5 to + 55
IP30	IP30	IP30	IP30
2	2	2	2
0.6	0.7	0.7	0.7
1.4	1.4	1.4	1.4
1.4	1.4	1.4	1.4
2	2	2	2
260	310	380	274
84	84	84	108
94	94	94	118



# Enclosed Automatic Transfer Switch

Rapid industrialization and urbanization are leading to ever-rising demand for reliable electricity.

Technological advancement and changing lifestyles have given rise to many applications which demand 24 X7 uninterruptible power supply. In some industries, power outages for even short duration may lead to considerable commercial losses.

L&T's Enclosed Automatic Transfer Switch(ATS) constantly monitors the incoming power sources and seamlessly switches the load to the 'back-up' supply when it senses variation or abnormality in the main supply. Once main supply is restored, the load is automatically shifted to the main supply.

Option of priority source selection and swapping gives additional flexibility to suit different site requirements.

These switches are very convenient to use as one does not have to manually operate the switch.

The typical applications are in critical processes in various industries and also in growing residential, commercial & infrastructure segments.

## **Enclosed Automatic Transfer Switch(ATS):**

L&T's C-Line Motorised Changeover switch alongwith AuxC 2000 controller is completely pre-programmed and pre-wired Automatic Source Transfer Solution.

What's more is that the complete ensemble is mounted in a smart engineered SS enclosure providing a ready, convenient -to-use solution.

## **Automatic Solution | Pre-wired | Flexible Settings**

# Enclosed Automatic Transfer Switch

Range:  
125A to 630A,  
415V AC



## Flexibility

- Priority Source Selection
- Adjustable Time Delay (0.1 sec to 3 hours)
- Suitable for 3-Phase as well as 1-Phase Sources



## Performance

- Double-Break Contact System offering High Short-time withstand ( $I_{cw}$ )
- High Mechanical & Electrical Life: Double than requirement of IS/IEC Standard
- Suitable for Aluminium Termination



## Safety

- Protections : UV/OV, Phase Sequence, Single Phasing, Frequency
- Authorized Access Control through Password Protection
- Inbuilt Terminal Shrouds, Phase Barriers & Source Separator



## Convenience

- Ample Space for Cable Termination, No need of Separate Cable Gland Box
- Ease of Generator Control (ON-OFF Cooling Cycle, Self-Test)
- Cyclic Event Logger : Logs 100 Events

# Enclosed Automatic Transfer Switch

## Pre-programmed Parameters

Programming	Connection Terminal	Code	Setting (Description)
Inputs	15(INP1)	M10>> P10.01.01	Line 1 closed (Feedback 1)
	16(INP2)	M10>> P10.02.01	Line 2 closed (Feedback 2)
Outputs	25(OUT4)	M11>> P11.04.01	Close line 1
	27(OUT5)	M11>> P11.05.01	Open line 1 / line 2
	30(OUT7)	M11>> P11.07.01	Close line 2
Others	—	M05>> P05.07	Changeover Pulse

## Time Delay Setting

Parameter	Code	Default Setting	Comments
Line 1 to Line 2 interlock time	M05>>P05.03	0.1	0.1....1800Sec
Line 2 to Line 1 interlock time	M05>>P05.04	0.1	0.1....1800Sec
Presence delay (When Line 2 source not available)	M06>>P06.07	1	1....6000Sec
Presence delay (When Line 2 source available)	M06>>P06.08	1	1....6000Sec
Presence delay (When Line 1 source not available)	M07>>P07.07	1	1....6000Sec
Presence delay (When Line 2 source available)	M07>>P07.08	1	1....6000Sec

## Protection Parameter Setting

Parameter	Code	Default Setting
Phase Sequence Control	M02>>P02.05	OFF
Undervoltage setting for Line 1	M06>>P06.01	85%
Overvoltage setting for Line 1	M06>>P06.04	110%
Undervoltage setting for Line 2	M07>>P07.01	85%
Overvoltage setting for Line 2	M07>>P07.04	110%

## General Control Setting

Parameter	Code	Default Setting	Comments
Select Nominal Voltage	M02>>P02.01	400	50-5000 V AC
Select Voltage Control Mode	M02>>P02.07	L-L	L-L L-N L-L+L-N
Select Priority Line	M05>>P05.02	-1-	-1- Line 1 -2- Line 2

## Generator Start/Stop Control

Parameter	Code	Default Setting	Comments
Digital Output 3 (Terminal No. 22 & 23)	M11>> P11.03.01	Start/Stop remote control of line 2 generator	Hardwire to general controller for ON/OFF Control
Digital Input 6 (Terminal No. 20 & 21)	M10>> P10.06.01	Generator ready 2	Hardwire for generator status feedback

Note : Refer AuXC2000- Automatic Transfer Controller Manual for further details and complete settings/programming parameters

# Ordering Information



Inclusive of cable gland box

Frame	Rating (A)	Manual open execution version	Manual SS enclosure version	Fuse mountable kit	Motorised Open Execution Version	Enclosed ATS
Control Voltage		–	–	–	240 V ac	240 V ac
I	63 A	CO106300000	CO106300S00	CX106300OCO	–	–
		CO106300OOD*				
	100 A	CO110000000	CO110000S00	–	–	
		CO110000OOD*				
125 A	CO112500000	CO112500S00	–	–		
II	125 A	CO212500000	CO212500S00	CX212500ODO	CK90161B000	CK90161BS00
	160 A	CO216000000	CO216000S00	CX216000ODO	CK90162B000	CK90162BS00
	200 A	CO22000000A	CO220000S00	–	CK90163B000	CK90163BS00
III	250 A	CO325000000	CO325000S00	CX325000ODO	CK90164B000	CK90164BS00
	315 A	CO331500000	CO331500S00	CX331500ODO	CK90165B000	CK90165BS00
IV	400 A	CO440000000	CO440000S00	CX440000ODO	CK90166B000	CK90166BS00
	630 A	CO463000000	CO463000S00	–	CK90167B000	CK90167BS00
V	630 A	CO563000000	–	CX563000ODO	CK90168B000	–
	800 A	CO580000000	CO580000S00	CX580000ODO	CK90169B000	
	1000 A	CO510000000	CO510000S00	–	CK90170B000	
VI	1250 A	CO612500000 ♦	–	–	CK90081B000	–
	1600 A	CO616000000 ♦	–	–	CK90082B000	
	2000 A	CO620000000 ♦	–	–	CK90083B000	

\* Direct Handle Version ♦ Center operation Version



Frame	Rating (A)	Auxiliary contact for manual version (2 sets of changeover contact)	Operating handle suitable for		Operating push button assembly with Wire harness	UV/OV based AST Controller with Wire harness	AuXC 2000 controller with Wire harness
			Manual version	Motorised version	240 V ac	240 V ac	
I	63 A, 100 A, 125 A	CX100020000	CX100010000	–	–	–	–
II	125 A, 160 A, 200 A	CX200020000	CX300010000	CK903740000	CK901950000	CK901920000	AuXC2000 Controller ATC200000000
III	250 A, 315 A	CX300020000	CK903920000#				
IV	400 A, 630 A	CX400020000	CX400010000	CK903780000			
V	800 A, 100 0A	CX500020000	CX500010000				
VI	1250 A, 1600 A, 2000 A	CX600020000	CX600010000	CK906450000			

Output shorting link CO1-(63-100A) Top Side	CX10005000T
Output shorting link CO1-(63-100A) Bottom Side	CX10005000B