

TEKNIC



Control and Signaling Devices Ø 22.5 Metal Series



Control and signalling devices Ø 22.5

Salient features

This range of Ø 22.5 pushbuttons, selector switches, illuminated switches, illuminated selector switches and pilot lights have been designed to provide the following salient features:

- Economy of space
- Aesthetically elegant
- SELF WIPING CONTACT
- Robust in materials of construction
- Simple to fix - screw driver is all that required
- Safe in operation
- Very good flame resistance
- Protection against electric shock (unit earthed)
- Shrouded terminals

Actuators

The circular actuators have chrome plated metal bezels, and are interchangeable on the different types of contact elements.

Contact elements

The contact elements are double break and have self wiping contacts. The elements are interchangeable and can be stacked without additional hardware. 1 to 6 elements (NO or NC) can be used with non illuminated actuators, whereas, 1 to 4 elements (NO or NC) can be used for illuminated actuators. Gold plated NO and NC contact elements for low voltage, low current switching circuits < 25 mA, are available.



Illuminated pushbuttons and pilot lights

Pilot lights and illuminated switches are suitable for direct connection, through series resistor, through series resistor and diode, using bayonet cap filament bulb type BA9S, as follow:

Supply voltage for direct connection without series resistor : 6V-130V

Supply voltage through series resistor : 12V-415V

Supply voltage through series resistor and diode : 230V AC

Bulb : Filament, type BA9S with OAL max., 28 mm

LED illuminated actuators & pilot lights are available with integral LED, LED in bayonet cap suitable for operating at various voltages namely 6V, 12V, 24V, 30V, 48V, 110V, 230V, AC or DC and 415V AC. LED bulbs with bayonet cap are constructed in the standard BA9S design with OAL max. 28 mm. On request an extra short circuit protection consisting of built in fuse in the LED modules can be provided.

Pilot lights are available with built in transformers suitable for operating at 230, 110 volts AC input and 6V, 12V and 24V output.


Terminals

Contact elements and pilot lights are designed to have shrouded terminals with combi screws.

Fixing

The control devices Ø 22.5 can be fixed in any position on panels of 1 to 6 mm thickness. We recommend minimum fixing centers of 30 mm X 40 mm. However, the dimensions and configuration should be decided on the basis of the application. The actuators and the lens assemblies lock on to the holding bracket using a bayonet type of fixing which enables a simple and fast assembly. The complete assembly is locked into position on the panel by two M4 pointed screws on the bracket, tightened equally from the rear. The screws should be tightened adequately to such an extent as to pierce through the paint on the panel from inside. These screws also ensure the earthing of the unit.

Fixing arrangement



Electrical and mechanical characteristics

Environment

Standard conformity

: CSA - C22.2 No. 14-95, UL508, IEC 947 - 5 (1) 1990, IS 13947

Approvals

: ASTA UK certified as per IEC 947 - 5 - (1) 1990

Degree of protection

: CSA - C22.2 No. 14-95, UL508

Ambient

: IP 65 as per IEC 529, NEMA 4X, 12 as per UL 50

Operating position

: - 25°C to + 70°C

: All positions

Contact Block

Rated insulation voltage

: 500 V

Rated thermal current

: 10 A

Contact operation

: Self wiping, slow break NO or NC

Make and break capacity

As per IEC 947 - 5 - (1) 1990

: AC 15 4 A, 415V AC

: DC 13 0.5 A, 110V DC

: A 600 Q600

: minimum 1 x 0.5 mm², maximum 2 x 1.5 mm² or 1 x 2.5 mm²

: 1-2 for NC, 3-4 for NO

: 10 A cartridge fuse HRC type, rated for resistive loading

: Over 1 million operations

Electric rating

(for 1 million operation cycles, operation at 3600 cycles per hour, load factor 0.5)

	V	24	120	230		V	24	110
: AC 15	A	5	4	3	: DC 13	A	0.5	0.2

Modules for pilot light & illuminated switches with integral LED / multichip LED bulb (BA9S cap)

Current consumptions (applicable to all colours)

24 VAC/DC, 110 VAC & 240 VAC

: max. 20 mA

110 VDC

: max. 15 mA

220 VDC

: max. 10 mA

Service life (at nominal voltage and at ambient temperature of 25°C)

: 100,000 hours

Voltage limits (nominal voltage)

: < 20% of rated voltage >

Short circuit protection

: on specific request

Terminal capacity

: min. 1 x 0.5 mm², max. 2 x 1.5 mm² or 1 x 2.5 mm²


Control and signalling devices Ø 22.5

Ordering instructions

1. Actuators, illuminated actuators, contact elements, lense assemblies & pilot lights can all be ordered separately or in combination.
2. The type numbers of contact elements are : NO: Actuator mounting : S1, S3 Note:
Individual mounting : S5, S7 S3, S4, S7, S8 are gold plated contacts
NC: Actuator mounting : S2, S4 suitable for low voltage, low current
Individual mounting : S6, S8 switching circuits < 25 mA

3. Some examples of type numbers:

- Actuator : Type 2AF3 is flush actuator, GREEN
Pilot light : Type 2PLB4 is pilot light without series resistor, RED
Complete pushbutton : Type 2PSF411 is flush pushbutton, RED, with 1NO+1NC contact elements



Accessories and spares

Legend plates

Legend plates 30 x 40 mm are supplied with the following standard texts:

START FORWARD UP OPEN AUTO SLOW RESET ON RIGHT TRIP
STOP REVERSE DOWN CLOSE HAND FAST INCH OFF LEFT POWER ON


Legend plate Ø 60 mm yellow with black characters for EMERGENCY STOP



Filament bulb

Filament bulb type BA9S, OAL 28mm

Voltage	: 6	12	24	30	48	60	130
Watts	: 1	2	2	2	2	2	2,6



LED bulb

LED multichip bulb type BA9S, OAL 28mm

Colour	: White	Green	Red	Amber	Blue	Yellow	V	W
Type No.	: MCB9124	MCB9324	MCB9424	MCB9524	MCB9624	MCB9824	24	0,5
	MCB91110	MCB93110	MCB94110	MCB95110	MCB96110	MCB98110	110	1,0
	MCB91230	MCB93230	MCB94230	MCB95230	MCB96230	MCB98230	230	1,0



Lenses

Colour of lense : Translucent White Green Red Amber Blue Clear Yellow

For pilot lights with filament bulb 2PLL1 2PLL3 2PLL4 2PLL5 2PLL6 2PLL7 2PLL8

For illuminated actuators with filament bulb (flush/projecting) 2LAL1 2LAL3 2LAL4 2LAL5 2LAL6 2LAL7 2LAL8

For pilot lights with LED 2PLL1L 2PLL3L 2PLL4L 2PLL5L 2PLL6L 2PLL7L 2PLL8L

For illuminated actuators with LED (flush/projecting) 2LAL1L 2LAL3L 2LAL4L 2LAL5L 2LAL6L 2LAL7L 2LAL8L




Push Push mechanism for converting spring return actuator into stay put type

Type No.: 2PPM




Adaptor for fixing Ø 22.5 devices in Ø 30.5 cutout.

Type No.: 2ADP



Fixing flange

Type No.: 2BRK



Padlock

For mushroom actuator : type no. 2PAM

For projecting actuator : type no. 2PAP



Boots for booted actuators

Colour of Boot : Black Green Red Blue Yellow

Type No. : 2BT2 2BT3 2BT4 2BT6 2BT8



Boot for non ill. flush actuator

Colour of Boot : Clear

Type No. : 2BT7



Boot for flush / proj. ill actuator

Colour of Boot : Clear

Type No. : 2ALBT7



Boot for twin actuator

Colour of Boot : Clear

Type No. : 2ATBT7



Boot for twin ill. actuator

Colour of Boot : Clear

Type No. : 2ATLBT7



Bulb extractor

Type No.: 2BA9SE



Blanking plug for Ø 22.5 hole, black


Type No.: 2BP2



TEKNIC

Control & Signalling Devices 22.5 Ø
METALLIC SERIES

MOMENTARY ACTUATORS

	TYPE	COLOUR	ORDERING CODE	
		White	2AF1	
	Flush	Black	2AF2	
		Green	2AF3	
		Red	2AF4	
		Blue	2AF6	
		Yellow	2AF8	
		White	2AF1A	
	Flush with arrow marking	Black	2AF2A	
		Green	2AF3A	
		Red	2AF4A	
		Blue	2AF6A	
		Yellow	2AF8A	
		White	2AP1	
	Projecting	Black	2AP2	
		Green	2AP3	
		Red	2AP4	
		Blue	2AP6	
		Yellow	2AP8	
				
	Flush Relay Reset	White	2AF1RR	
		Black	2AF2RR	
		Green	2AF3RR	
		Red	2AF4RR	
		Blue	2AF6RR	
		Yellow	2AF8RR	
				
	Recess head	White	2AF1RH	
		Black	2AF2RH	
		Green	2AF3RH	
		Red	2AF4RH	
		Blue	2AF6RH	
		Yellow	2AF8RH	
				
	Booted	Black	2AB2	
		Green	2AB3	
		Red	2AB4	
		Blue	2AB6	
		Yellow	2AB8	

TEKNIC

Control & Signalling Devices 22.5 Ø
METALLIC SERIES

MUSHROOM ACTUATORS				
	TYPE	COLOUR	ORDERING CODE	
				
		Black	2AM2	
	Momentary Ø 40mm	Green	2AM3	
		Red	2AM4	
		Blue	2AM6	
		Yellow	2AM8	
				
	Latching Ø 30mm	Black	2AMLS2	
		Red	2AMLS4	
				
	Latching Ø 40mm	Black	2AML2	
		Red	2AML4	
				
	Push-Pull Ø 40mm	Black	2AMPP2	
		Red	2AMPP4	
				
	Latching with Key Ø 40mm	Black	2AMLKB2	
		Red	2AMLKB4	

TEKNIC

Control & Signalling Devices 22.5 Ø
METALLIC SERIES









MUSHROOM ACTUATORS

	TYPE	COLOUR	ORDERING CODE	
				
	Latching Trigger	Black	2AMLT2	
	Ø 40mm	Red	2AMLT4	
				
	Latching Trigger	Black	2AMLTKB2	
	with key Ø 40mm	Red	2AMLTKB4	
				
	Latching	Black	2AMLJ2	
	Ø 60mm	Red	2AMLJ4	
				
	Push-Pull	Black	2AMPPJ2	
	Ø 60mm	Red	2AMPPJ4	
		Black	2AMJ2	
	Momentary	Green	2AMJ3	
	Ø 60mm	Red	2AMJ4	
		Blue	2AMJ6	
		Yellow	2AMJ8	

TEKNIC

Control & Signalling Devices 22.5 Ø
METALLIC SERIES

SELECTOR ACTUATORS

	TYPE		COLOUR	ORDERING CODE	
	SELECTOR				
	2 position		Black	2AS2-2P	
	LATCHING				
	With ext. knob			2AS2E-2P	
	2 position		Black	2AS2-2PSR	
	MOMENTARY				
	With ext. knob			2AS2E-2PSR	
	3 position		Black	2AS2-3P	
	STAY PUT				
	With ext. knob			2AS2E-3P	
	3 position		Black	2AS2-3PSR	
	MOMENTARY				
	on both sides				
	With ext. knob			2AS2E-3PSR	
	3 position		Black	2AS2-3PSRR	
	MOMENTARY				
	on right				
	With ext. knob			2AS2E-3PSRR	
	3 position		Black	2AS2-3PSRL	
	MOMENTARY				
	on left				
	With ext. knob			2AS2E-3PSRL	

TEKNIC

Control & Signalling Devices 22.5 Ø
METALLIC SERIES



KEY SELECTOR



	TYPE		COLOUR	ORDERING CODE	
	2 POSITION		Black	2AK2-2PB	
	Stayput				
				2AK2-2PO	
				2AK2-2PI	
	Spring Return		Black	2AK2-2POSR	
	3 POSITION		Black	2AK2-3PA	
	Stayput				
				2AK2-3PB	
				2AK2-3PC	
	Spring Return		Black	2AK2-3PSR	
	Spring Return		Black	2AK2-3PSRR	
	right to centre				
	Spring Return		Black	2AK2-3PSRL	
	left to centre				
* X stands for position in which key is removable					

TEKNIC

Control & Signalling Devices 22.5 Ø
METALLIC SERIES

TWIN ACTUATORS				
	TYPE	COLOUR	ORDERING CODE	
 				
		Green	2ATF3F4	
	Double Flush	Red		
	w/o IO Mark	Yellow	2ATF8F2	
		Black		
		Green	2ATF3F4(IO)	
	Double Flush	Red		
	with IO Mark	Yellow	2ATF8F2(IO)	
		Black		
		Green	2ATF3P4	
	1 Flush,	Red		
	1 Projecting	Yellow	2ATF8P2	
	w/o IO Mark	Black		
		Green	2ATF3P4(IO)	
	1 Flush,	Red		
	1 Projecting	Yellow	2ATF8P2(IO)	
	with IO Mark	Black		

TEKNIC

Control & Signalling Devices 22.5 Ø

METALLIC SERIES

ILLUMINATED ACTUATOR WITH FILAMENT BULB					
	TYPE	COLOUR	ORDERING CODE		
	Illuminated Flush, Momentary				
					
		White	2ALF1		
	Filament Bulb	Green	2ALF3		
	6V to 130V AC/DC	Red	2ALF4		
		Amber	2ALF5		
		Blue	2ALF6		
		Clear	2ALF7		
		Yellow	2ALF8		
Direct Connection	Please mention the voltage required after the ordering code				
					
		White	2ALRF1		
	Filament Bulb	Green	2ALRF3		
	24V, 48V, 110V and 230 V	Red	2ALRF4		
	AC/DC	Amber	2ALRF5		
		Blue	2ALRF6		
		Clear	2ALRF7		
		Yellow	2ALRF8		
Connection with Resistor	Please mention the voltage required after the ordering code				
	Illuminated Projecting, Momentary				
					
		White	2ALP1		
	Filament Bulb	Green	2ALP3		
	6V to 130V AC/DC	Red	2ALP4		
		Amber	2ALP5		
		Blue	2ALP6		
		Clear	2ALP7		
		Yellow	2ALP8		
Direct Connection	Please mention the voltage required after the ordering code				
					
		White	2ALRP1		
	Filament Bulb	Green	2ALRP3		
	24V, 48V, 110V and 230 V	Red	2ALRP4		
	AC/DC	Amber	2ALRP5		
		Blue	2ALRP6		
		Clear	2ALRP7		
		Yellow	2ALRP8		
Connection with Resistor	Please mention the voltage required after the ordering code				

TEKNIC

Control & Signalling Devices 22.5 Ø









METALLIC SERIES

ILLUMINATED FLUSH ACTUATOR WITH LED

	TYPE	COLOUR of LED / LENS	ORDERING CODE			
	Illuminated Flush actuator, Momentary					
		Yellow LED / White Lens	2ALRF1L			
	Integral LED	White LED / White Lens	2ALRF1L(S)			
	6V, 12V, 24V, 48V AC/DC	Green LED / Green Lens	2ALRF3L			
	110VAC, 110VDC,	Red LED / Red Lens	2ALRF4L			
	230VAC, 220VDC	Amber LED / Amber Lens	2ALRF5L			
		Blue LED / Blue Lens	2ALRF6L			
		Yellow LED / Clear Lens	2ALRF7L			
		White LED / Clear Lens	2ALRF7L(S)			
		Yellow LED / Yellow Lens	2ALRF8L			
Integral LED	Please mention the voltage required after the ordering code					
		Yellow LED Bulb / White Lens	2ALF1LB			
	LED Bulb, BA9S type	White LED Bulb / White Lens	2ALF1LB(S)			
	24V AC/DC,	Green LED Bulb / Green Lens	2ALF3LB			
	110VAC, 110VDC	Red LED Bulb / Red Lens	2ALF4LB			
	230VAC, 220VDC	Amber LED Bulb / Amber Lens	2ALF5LB			
		Blue LED Bulb / Blue Lens	2ALF6LB			
		Yellow LED Bulb / Clear Lens	2ALF7LB			
		White LED Bulb / Clear Lens	2ALF7LB(S)			
		Yellow LED Bulb / Yellow Lens	2ALF8LB			
LED Bulb	Please mention the voltage required after the ordering code					
		White LED / White Lens	2ALRF1LF			
	Integral LED	White LED / White Lens	2ALRF1L(S)F			
	24V, 110V, 230V, AC	Green LED / Green Lens	2ALRF3LF			
		Red LED / Red Lens	2ALRF4LF			
		Amber LED / Amber Lens	2ALRF5LF			
		Blue LED / Blue Lens	2ALRF6LF			
		Yellow LED / Clear Lens	2ALRF7LF			
		White LED / Clear Lens	2ALRF7L(S)F			
		Yellow LED / Yellow Lens	2ALRF8LF			
Flasher with Integral LED	Please mention the voltage required after the ordering code					
	Illuminated Projection Actuator, Momentary					
		Yellow LED / White Lens	2ALRP1L			
	Integral LED	White LED / White Lens	2ALRP1L(S)			
	6V, 12V, 24V, 48V AC/DC	Green LED / Green Lens	2ALRP3L			
	110VAC, 110VDC,	Red LED / Red Lens	2ALRP4L			
	230VAC, 220VDC	Amber LED / Amber Lens	2ALRP5L			
		Blue LED / Blue Lens	2ALRP6L			
		Yellow LED / Clear Lens	2ALRP7L			
		White LED / Clear Lens	2ALRP7L(S)			
		Yellow LED / Yellow Lens	2ALRP8L			
Integral LED	Please mention the voltage required after the ordering code					
		Yellow LED Bulb / White Lens	2ALP1LB			
	LED Bulb, BA9S type	White LED Bulb / White Lens	2ALP1LB(S)			
	24V AC/DC,	Green LED Bulb / Green Lens	2ALP3LB			
	110VAC, 110VDC	Red LED Bulb / Red Lens	2ALP4LB			
	230VAC, 220VDC	Amber LED Bulb / Amber Lens	2ALP5LB			
		Blue LED Bulb / Blue Lens	2ALP6LB			
		Yellow LED Bulb / Clear Lens	2ALP7LB			
		White LED Bulb / Clear Lens	2ALP7LB(S)			
		Yellow LED Bulb / Yellow Lens	2ALP8LB			
LED Bulb	Please mention the voltage required after the ordering code					
		White LED / White Lens	2ALRP1LF			
	Integral LED	White LED / White Lens	2ALRP1L(S)P			
	24V, 110V, 230V, AC	Green LED / Green Lens	2ALRP3LF			
		Red LED / Red Lens	2ALRP4LF			
		Amber LED / Amber Lens	2ALRP5LF			
		Blue LED / Blue Lens	2ALRP6LF			
		Yellow LED / Clear Lens	2ALRP7LF			
		White LED / Clear Lens	2ALRP7L(S)P			
		Yellow LED / Yellow Lens	2ALRP8LF			
Flasher with Integral LED	Please mention the voltage required after the ordering code					

TEKNIC









Control & Signalling Devices 22.5 Ø
METALLIC SERIES

ILLUMINATED SELECTOR WITH FILAMENT BULB				
	TYPE	COLOUR	ORDERING CODE	
	2 Position Stayput illuminated selector actuator			
		White	2ASL1-2P	
	Filament bulb	Green	2ASL3-2P	
	6V to 130V AC/DC	Red	2ASL4-2P	
		Amber	2ASL5-2P	
		Blue	2ASL6-2P	
		Clear	2ASL7-2P	
		Yellow	2ASL8-2P	
Direct Connection	Please mention the voltage required after the ordering code			
		White	2ASLR1-2P	
	Filament bulb	Green	2ASLR3-2P	
	24 V,48V,110V,230V AC/DC	Red	2ASLR4-2P	
		Amber	2ASLR5-2P	
		Blue	2ASLR6-2P	
		Clear	2ASLR7-2P	
		Yellow	2ASLR8-2P	
Connection with Resistor	Please mention the voltage required after the ordering code			
	2 Position Momentary illuminated selector actuator			
		White	2ASL1-2PSR	
	Filament bulb	Green	2ASL3-2PSR	
	6V to 130V AC/DC	Red	2ASL4-2PSR	
		Amber	2ASL5-2PSR	
		Blue	2ASL6-2PSR	
		Clear	2ASL7-2PSR	
		Yellow	2ASL8-2PSR	
Direct Connection	Please mention the voltage required after the ordering code			
		White	2ASLR1-2PSR	
	Filament bulb	Green	2ASLR3-2PSR	
	24 V,48V,110V,230V AC/DC	Red	2ASLR4-2PSR	
		Amber	2ASLR5-2PSR	
		Blue	2ASLR6-2PSR	
		Clear	2ASLR7-2PSR	
		Yellow	2ASLR8-2PSR	
Connection with Resistor	Please mention the voltage required after the ordering code			

TEKNIC

Control & Signalling Devices 22.5 Ø
METALLIC SERIES












ILLUMINATED SELECTOR WITH LED

	TYPE	COLOUR	ORDERING CODE			
	2 Position, Stayput Illuminated Selector Actuator					
						
			Yellow LED / White Lens	2ASLR1L-2P		
	Integral LED		White LED / White Lens	2ASLR1L(S)-2P		
	6V, 12V, 24V, 48V AC/DC		Green LED / Green Lens	2ASLR3L-2P		
	110VAC, 110VDC,		Red LED / Red Lens	2ASLR4L-2P		
	230VAC, 220VDC		Amber LED / Amber Lens	2ASLR5L-2P		
			Blue LED / Blue Lens	2ASLR6L-2P		
			Yellow LED / Clear Lens	2ASLR7L-2P		
			White LED / Clear Lens	2ASLR7L(S)-2P		
		Yellow LED / Yellow Lens	2ASLR8L-2P			
Integral LED	Please mention the voltage required after the ordering code					
						
			Yellow LED Bulb / White Lens	2ASL1LB-2P		
	LED Bulb, BA9S type		White LED Bulb / White Lens	2ASL1LB(S)-2P		
	24V AC/DC,		Green LED Bulb / Green Lens	2ASL3LB-2P		
	110VAC, 110VDC		Red LED Bulb / Red Lens	2ASL4LB-2P		
	230VAC, 220VDC		Amber LED Bulb / Amber Lens	2ASL5LB-2P		
			Blue LED Bulb / Blue Lens	2ASL6LB-2P		
			Yellow LED Bulb / Clear Lens	2ASL7LB-2P		
			White LED Bulb/ Clear Lens	2ASL7LB(S)-2P		
		Yellow LED Bulb / Yellow Lens	2ASL8LB-2P			
LED Bulb	Please mention the voltage required after the ordering code					
	2 Position, Momentary Illuminated Selector Actuator					
						
			Yellow LED / White Lens	2ASLR1L-2PSR		
	Integral LED		White LED / White Lens	2ASLR1L(S)-2PSR		
	6V, 12V, 24V, 48V AC/DC		Green LED / Green Lens	2ASLR3L-2PSR		
	110VAC, 110VDC,		Red LED / Red Lens	2ASLR4L-2PSR		
	230VAC, 220VDC		Amber LED / Amber Lens	2ASLR5L-2PSR		
			Blue LED / Blue Lens	2ASLR6L-2PSR		
			Yellow LED / Clear Lens	2ASLR7L-2PSR		
			White LED / Clear Lens	2ASLR7L(S)-2PSR		
		Yellow LED / Yellow Lens	2ASLR8L-2PSR			
Integral LED	Please mention the voltage required after the ordering code					
						
			Yellow LED Bulb / White Lens	2ASL1LB-2PSR		
	LED Bulb, BA9S type		White LED Bulb / White Lens	2ASL1LB(S)-2PSR		
	24V AC/DC,		Green LED Bulb / Green Lens	2ASL3LB-2PSR		
	110VAC, 110VDC		Red LED Bulb / Red Lens	2ASL4LB-2PSR		
	230VAC, 220VDC		Amber LED Bulb / Amber Lens	2ASL5LB-2PSR		
			Blue LED Bulb / Blue Lens	2ASL6LB-2PSR		
			Yellow LED Bulb / Clear Lens	2ASL7LB-2PSR		
			White LED Bulb/ Clear Lens	2ASL7LB(S)-2PSR		
		Yellow LED Bulb / Yellow Lens	2ASL8LB-2PSR			
LED Bulb	Please mention the voltage required after the ordering code					

TEKNIC

Control & Signalling Devices 22.5 Ø
METALLIC SERIES











ILLUMINATED SELECTOR WITH FILAMENT BULB

	TYPE	COLOUR	ORDERING CODE			
3 Position illuminated selector actuator						
	Stayput	White	2ASL1-3P			
	Filament bulb	Green	2ASL3-3P			
	6V to 130V AC/DC	Red	2ASL4-3P			
		Amber	2ASL5-3P			
		Blue	2ASL6-3P			
		Clear	2ASL7-3P			
		Yellow	2ASL8-3P			
	Momentary	White	2ASL1-3PSR			
	Filament bulb	Green	2ASL3-3PSR			
	6V to 130V AC/DC	Red	2ASL4-3PSR			
		Amber	2ASL5-3PSR			
		Blue	2ASL6-3PSR			
		Clear	2ASL7-3PSR			
		Yellow	2ASL8-3PSR			
	Stayput / Momentary	White	2ASL1-3PSRL			
	Filament bulb	Green	2ASL3-3PSRL			
	Direct Connection	6V to 130V AC/DC	Red	2ASL4-3PSRL		
		Amber	2ASL5-3PSRL			
		Blue	2ASL6-3PSRL			
		Clear	2ASL7-3PSRL			
		Yellow	2ASL8-3PSRL			
Stayput / Momentary		White	2ASL1-3PSRR			
Filament bulb		Green	2ASL3-3PSRR			
6V to 130V AC/DC		Red	2ASL4-3PSRR			
		Amber	2ASL5-3PSRR			
		Blue	2ASL6-3PSRR			
		Clear	2ASL7-3PSRR			
		Yellow	2ASL8-3PSRR			
3 Position illuminated selector actuator						
	Stayput	White	2ASLR1-3P			
	Filament bulb	Green	2ASLR3-3P			
	24 V, 48V, 110V, 230V AC/DC	Red	2ASLR4-3P			
		Amber	2ASLR5-3P			
		Blue	2ASLR6-3P			
		Clear	2ASLR7-3P			
		Yellow	2ASLR8-3P			
	Momentary	White	2ASLR1-3PSR			
	Filament bulb	Green	2ASLR3-3PSR			
	24 V, 48V, 110V, 230V AC/DC	Red	2ASLR4-3PSR			
		Amber	2ASLR5-3PSR			
		Blue	2ASLR6-3PSR			
		Clear	2ASLR7-3PSR			
		Yellow	2ASLR8-3PSR			
	Stayput / Momentary	White	2ASLR1-3PSRL			
	Filament bulb	Green	2ASLR3-3PSRL			
	24 V, 48V, 110V, 230V AC/DC	Red	2ASLR4-3PSRL			
	Connection with Resistor		Amber	2ASLR5-3PSRL		
	Blue		2ASLR6-3PSRL			
	Clear		2ASLR7-3PSRL			
	Yellow		2ASLR8-3PSRL			
	Stayput / Momentary	White	2ASLR1-3PSRR			
	Filament bulb	Green	2ASLR3-3PSRR			
	24 V, 48V, 110V, 230V AC/DC	Red	2ASLR4-3PSRR			
		Amber	2ASLR5-3PSRR			
		Blue	2ASLR6-3PSRR			
		Clear	2ASLR7-3PSRR			
		Yellow	2ASLR8-3PSRR			

TEKNIC

Control & Signalling Devices 22.5 Ø
METALLIC SERIES

ILLUMINATED SELECTOR WITH LED

	TYPE	COLOUR	ORDERING CODE				
3 Position Illuminated Selector Actuator with Integral LED							
	Stayput	Yellow LED / White Lens	2ASLR1L-3P				
	Integral LED	White LED / White Lens	2ASLR1L(S)-3P				
	6V, 12V, 24V, 48V AC/DC	Green LED / Green Lens	2ASLR3L-3P				
	110VAC, 110VDC,	Red LED / Red Lens	2ASLR4L-3P				
	230VAC, 220VDC	Amber LED / Amber Lens	2ASLR5L-3P				
		Blue LED / Blue Lens	2ASLR6L-3P				
		Yellow LED / Clear Lens	2ASLR7L-3P				
		White LED / Clear Lens	2ASLR7L(S)-3P				
		Yellow LED / Yellow Lens	2ASLR8L-3P				
	Please mention the voltage required after the ordering code						
	Momentary	Yellow LED / White Lens	2ASLR1L-3PSR				
	Integral LED	White LED / White Lens	2ASLR1L(S)-3PSR				
	6V, 12V, 24V, 48V AC/DC	Green LED / Green Lens	2ASLR3L-3PSR				
	110VAC, 110VDC,	Red LED / Red Lens	2ASLR4L-3PSR				
	230VAC, 220VDC	Amber LED / Amber Lens	2ASLR5L-3PSR				
		Blue LED / Blue Lens	2ASLR6L-3PSR				
		Yellow LED / Clear Lens	2ASLR7L-3PSR				
		White LED / Clear Lens	2ASLR7L(S)-3PSR				
		Yellow LED / Yellow Lens	2ASLR8L-3PSR				
	Stayput / Momentary	Yellow LED / White Lens	2ASLR1L-3PSRL				
	Integral LED	White LED / White Lens	2ASLR1L(S)-3PSRL				
	6V, 12V, 24V, 48V AC/DC	Green LED / Green Lens	2ASLR3L-3PSRL				
	110VAC, 110VDC,	Red LED / Red Lens	2ASLR4L-3PSRL				
	230VAC, 220VDC	Amber LED / Amber Lens	2ASLR5L-3PSRL				
		Blue LED / Blue Lens	2ASLR6L-3PSRL				
Yellow LED / Clear Lens		2ASLR7L-3PSRL					
White LED / Clear Lens		2ASLR7L(S)-3PSRL					
Yellow LED / Yellow Lens		2ASLR8L-3PSRL					
Stayput / Momentary	Yellow LED / White Lens	2ASLR1L-3PSRR					
Integral LED	White LED / White Lens	2ASLR1L(S)-3PSRR					
6V, 12V, 24V, 48V AC/DC	Green LED / Green Lens	2ASLR3L-3PSRR					
110VAC, 110VDC,	Red LED / Red Lens	2ASLR4L-3PSRR					
230VAC, 220VDC	Amber LED / Amber Lens	2ASLR5L-3PSRR					
	Blue LED / Blue Lens	2ASLR6L-3PSRR					
	Yellow LED / Clear Lens	2ASLR7L-3PSRR					
	White LED / Clear Lens	2ASLR7L(S)-3PSRR					
	Yellow LED / Yellow Lens	2ASLR8L-3PSRR					
3 Position Illuminated Selector Actuator with LED Bulb							
	Stayput	Yellow LED Bulb / White Lens	2ASL1LB-3P				
	LED Bulb, BA9S type	White LED Bulb / White Lens	2ASL1LB(S)-3P				
	24V AC/DC,	Green LED Bulb / Green Lens	2ASL3LB-3P				
	110VAC, 110VDC	Red LED Bulb / Red Lens	2ASL4LB-3P				
	230VAC, 220VDC	Amber LED Bulb / Amber Lens	2ASL5LB-3P				
		Blue LED Bulb / Blue Lens	2ASL6LB-3P				
		Yellow LED Bulb / Clear Lens	2ASL7LB-3P				
		White LED Bulb / Clear Lens	2ASL7LB(S)-3P				
		Yellow LED Bulb / Yellow Lens	2ASL8LB-3P				
	Please mention the voltage required after the ordering code						
	Momentary	White LED / White Lens	2ASL1L-3PSR				
	LED Bulb, BA9S type	White LED / White Lens	2ASL1L(S)-3PSR				
	24V AC/DC,	Green LED / Green Lens	2ASL3L-3PSR				
	110VAC, 110VDC	Red LED / Red Lens	2ASL4L-3PSR				
	230VAC, 220VDC	Amber LED / Amber Lens	2ASL5L-3PSR				
		Blue LED / Blue Lens	2ASL6L-3PSR				
		Yellow LED / Clear Lens	2ASL7L-3PSR				
		White LED / Clear Lens	2ASL7L(S)-3PSR				
		Yellow LED / Yellow Lens	2ASL8L-3PSR				
	Stayput / Momentary	Yellow LED Bulb / White Lens	2ASL1LB-3PSRL				
	LED Bulb, BA9S type	White LED Bulb / White Lens	2ASL1LB(S)-3PSRL				
	24V AC/DC,	Green LED Bulb / Green Lens	2ASL3LB-3PSRL				
	110VAC, 110VDC	Red LED Bulb / Red Lens	2ASL4LB-3PSRL				
	230VAC, 220VDC	Amber LED Bulb / Amber Lens	2ASL5LB-3PSRL				
		Blue LED Bulb / Blue Lens	2ASL6LB-3PSRL				
Yellow LED Bulb / Clear Lens		2ASL7LB-3PSRL					
White LED Bulb / Clear Lens		2ASL7LB(S)-3PSRL					
Yellow LED Bulb / Yellow Lens		2ASL8LB-3PSRL					
Please mention the voltage required after the ordering code							
Stayput / Momentary	White LED / White Lens	2ASL1L-3PSRR					
LED Bulb, BA9S type	White LED / White Lens	2ASL1L(S)-3PSRR					
24V AC/DC,	Green LED / Green Lens	2ASL3L-3PSRR					
110VAC, 110VDC	Red LED / Red Lens	2ASL4L-3PSRR					
230VAC, 220VDC	Amber LED / Amber Lens	2ASL5L-3PSRR					
	Blue LED / Blue Lens	2ASL6L-3PSRR					
	Yellow LED / Clear Lens	2ASL7L-3PSRR					
	White LED / Clear Lens	2ASL7L(S)-3PSRR					
	Yellow LED / Yellow Lens	2ASL8L-3PSRR					

TEKNIC

Control & Signalling Devices 22.5 Ø
METALLIC SERIES

PILOT LIGHTS WITH BULB

	TYPE	COLOUR	ORDERING CODE		
	Pilot Light				
		White	2PLB1		
	Filament Bulb	Green	2PLB3		
	6V to 130V AC/DC	Red	2PLB4		
		Amber	2PLB5		
		Blue	2PLB6		
		Clear	2PLB7		
		Yellow	2PLB8		
Direct Connection	Please mention the voltage required after the ordering code				
		White	2PLBR1		
	Filament Bulb	Green	2PLBR3		
	24V, 48V, 110V, 230V, AC/DC	Red	2PLBR4		
		Amber	2PLBR5		
		Blue	2PLBR6		
		Clear	2PLBR7		
		Yellow	2PLBR8		
Connection with Resistor	Please mention the voltage required after the ordering code				
		White	2PLBR1240AC		
	Filament Bulb	Green	2PLBR3240AC		
	230V AC	Red	2PLBR4240AC		
		Amber	2PLBR5240AC		
		Blue	2PLBR6240AC		
		Clear	2PLBR7240AC		
		Yellow	2PLBR8240AC		
Connection with Resistor+Diode					
	Filament Bulb				
	Primary volt. Sec. Volt	White	2PLBT1 XX / YYY		
	110VAC 6	Green	2PLBT3 XX / YYY		
	110VAC 12	Red	2PLBT4 XX / YYY		
	110VAC 24	Amber	2PLBT5 XX / YYY		
	Primary volt. Sec. Volt	Blue	2PLBT6 XX / YYY		
	240VAC 6	Clear	2PLBT7 XX / YYY		
	240VAC 12	Yellow	2PLBT8 XX / YYY		
	240VAC 24				
Connection with Transformer	XX - Primary Voltage YYY - Secondary Voltage				

TEKNIC

Control & Signalling Devices 22.5 Ø

METALLIC SERIES




PILOT LIGHTS

	Type	Colour of Lens / LED	Ordering			
			Code			
	Pilot Light with Integral LED					
		Yellow LED / White Lens	2PLBR1L			
	Integral LED	White LED / White Lens	2PLBR1L(S)			
	6V, 12V, 24V, 48V AC/DC	Green LED / Green Lens	2PLBR3L			
	110VAC, 110VDC,	Red LED / Red Lens	2PLBR4L			
	230VAC, 220VDC	Amber LED / Amber Lens	2PLBR5L			
		Blue LED / Blue Lens	2PLBR6L			
		Yellow LED / Clear Lens	2PLBR7L			
		White LED / Clear Lens	2PLBR7L(S)			
		Yellow LED / Yellow Lens	2PLBR8L			
	Please mention the voltage required after the ordering code					
Integral LED	Integral LED, Flasher	Yellow LED / White Lens	2PLFBR1LF			
		White LED / White Lens	2PLFBR1LF(S)			
	6V, 12V, 24V, 48V AC/DC	Green LED / Green Lens	2PLFBR3LF			
	110VAC, 110VDC,	Red LED / Red Lens	2PLFBR4LF			
	230VAC, 220VDC	Amber LED / Amber Lens	2PLFBR5LF			
		Blue LED / Blue Lens	2PLFBR6LF			
		Yellow LED / Clear Lens	2PLFBR7LF			
		White LED / Clear Lens	2PLFBR7LF(S)			
		Yellow LED / Yellow Lens	2PLFBR8LF			
	Integral LED, Universal	Yellow LED / White Lens	2PLBR1LU			
	24V upto 240V AC / DC	White LED / White Lens	2PLBR1LU(S)			
		Green LED / Green Lens	2PLBR3LU			
		Red LED / Red Lens	2PLBR4LU			
		Amber LED / Amber Lens	2PLBR5LU			
		Blue LED / Blue Lens	2PLBR6LU			
		Yellow LED / Clear Lens	2PLBR7LU			
		White LED / Clear Lens	2PLBR7LU(S)			
Integral LED		Yellow LED / Yellow Lens	2PLBR8LU			
		Yellow LED / White Lens	2PLBR1L			
	Integral LED	White LED / White Lens	2PLBR1L(S)			
	415VAC	Green LED / Green Lens	2PLBR3L			
		Red LED / Red Lens	2PLBR4L			
		Amber LED / Amber Lens	2PLBR5L			
		Blue LED / Blue Lens	2PLBR6L			
		Yellow LED / Clear Lens	2PLBR7L			
		White LED / Clear Lens	2PLBR7L(S)			
	Integral LED		Yellow LED / Yellow Lens	2PLBR8L		
Pilot Light with LED Bulb						
		Yellow LED Bulb / White Lens	2PLB1LB			
	LED Bulb, BA9S type	White LED Bulb / White Lens	2PLB1LB(S)			
	24V AC/DC,	Green LED Bulb / Green Lens	2PLB3LB			
	110VAC, 110VDC	Red LED Bulb / Red Lens	2PLB4LB			
	230VAC, 220VDC	Amber LED Bulb / Amber Lens	2PLB5LB			
		Blue LED Bulb / Blue Lens	2PLB6LB			
		Yellow LED Bulb / Clear Lens	2PLB7LB			
		White LED Bulb/ Clear Lens	2PLB7LB(S)			
		Yellow LED Bulb / Yellow Lens	2PLB8LB			
Please mention the voltage required after the ordering code						
	LED Bulb	Yellow LED Bulb / White Lens	2PLBT1LBXX/YYY			
	Primary volt. Sec. Volt	White LED Bulb / White Lens	2PLB1LB(S)XX/YYY			
	110VAC 6	Green LED Bulb / Green Lens	2PLB3LBXX/YYY			
	110VAC 12	Red LED Bulb / Red Lens	2PLB4LBXX/YYY			
	110VAC 24	Amber LED Bulb / Amber Lens	2PLB5LBXX/YYY			
	Primary volt. Sec. Volt	Blue LED Bulb / Blue Lens	2PLB6LBXX/YYY			
	240VAC 6	Yellow LED Bulb / Clear Lens	2PLB7LBXX/YYY			
	240VAC 12	White LED Bulb/ Clear Lens	2PLB7LB(S)XX/YYY			
	240VAC 24	Yellow LED Bulb / Yellow Lens	2PLB8LBXX/YYY			
Connection with Transformer			XX - Primary Voltage			
			YYY - Secondary Voltage			

TEKNIC





Control & Signalling Devices 22.5 Ø
METALLIC SERIES

TWIN ILLUMINATED

	Type	COLOUR	ORDERED CODE
Twin Illuminated 1 Flush, 1 Projecting (IO) Mark with Filament Bulb			
	Filament bulb	Red button	2ATL5 F3P4 (IO)
	6V to 130V AC/DC	Green button	
		Amber lens	
Direct Connection	Please mention the voltage required after the ordering code		
	Filament bulb	Red button	2ATLR5 F3P4 (IO)
	24 V,48V,110V,230V AC/DC	Green button	
		Amber lens	
Connection with Resistor	Please mention the voltage required after the ordering code		
Twin Illuminated Double Flush, (IO) Mark with Filament Bulb			
	Filament bulb	Red button	2ATL5 F3F4 (IO)
	6V to 130V AC/DC	Green button	
		Amber lens	
Direct Connection	Please mention the voltage required after the ordering code		
	Filament bulb	Red button	2ATLR5 F3F4 (IO)
	24 V,48V,110V,230V AC/DC	Green button	
		Amber lens	
Connection with Resistor	Please mention the voltage required after the ordering code		





TEKNIC

Control & Signalling Devices 22.5 Ø
METALLIC SERIES

TWIN ILLUMINATED WITH LED						
	TYPE	COLOUR	ORDERING CODE			
	Twin Illuminated 1 Flush, 1 Projecting (IO) Mark					
	Integral LED	Green	2ATLR5LF3P4 (IO)			
	6V, 12V, 24V, 48V AC/DC	Red				
	110VAC, 110VDC,	Amber lens				
	230VAC, 220VDC					
Integral LED	Please mention the voltage required after the ordering code					
	LED Bulb,BA9S type	Green	2ATL5LBF3P4 (IO)			
	24V AC/DC,	Red				
	110VAC, 110VDC	Amber lens				
	230VAC, 220VDC					
LED Bulb	Please mention the voltage required after the ordering code					
	Twin Illuminated Double Flush (IO) Marked					
	Integral LED	Green	2ATLR5LF3F4 (IO)			
	6V, 12V, 24V, 48V AC/DC	Red				
	110VAC, 110VDC,	Amber lens				
	230VAC, 220VDC					
Integral LED	Please mention the voltage required after the ordering code					
	LED Bulb,BA9S type	Green	2ATL5LBF3F4 (IO)			
	24V AC/DC,	Red				
	110VAC, 110VDC	Amber lens				
	230VAC, 220VDC					
LED Bulb	Please mention the voltage required after the ordering code					



TEKNIC

Control & Signalling Devices 22.5 Ø METALLIC SERIES

ILLUMINATED MUSHROOM						
	TYPE		COLOUR	ORDERING CODE		
	Illuminated Mushroom, Momentary with Filament Bulb					
						
	Filament bulb		Red	2ALM4		
	6V to 130V AC/DC					
Direct Connection	Please mention the voltage required after the ordering code					
						
	Filament bulb		Red	2ALRM4		
	24 V,48V,110V,230V AC/DC					
Connection with Resistor	Please mention the voltage required after the ordering code					
	Illuminated Mushroom, Push Pull with Filament Bulb					
						
	Filament bulb		Red	2ALMPP4		
	6V to 130V AC/DC					
Direct Connection	Please mention the voltage required after the ordering code					
						
	Filament bulb		Red	2ALRMPP4		
	24 V,48V,110V,230V AC/DC					
Connection with Resistor	Please mention the voltage required after the ordering code					

TEKNIC

Control & Signalling Devices 22.5 Ø
METALLIC SERIES

ILLUMINATED MUSHROOM WITH LED						
	TYPE	COLOUR	ORDERING CODE			
	Illuminated Mushroom, Momentary					
	Integral LED	Red	2ALRM4L			
	6V, 12V, 24V, 48V AC/DC					
	110VAC, 110VDC,					
	230VAC, 220VDC					
Integral LED	Please mention the voltage required after the ordering code					
	LED Bulb, BA9S type	Red	2ALM4LB			
	24V AC/DC,					
	110VAC, 110VDC					
	230VAC, 220VDC					
LED Bulb	Please mention the voltage required after the ordering code					
	Illuminated Mushroom, Push Pull					
	Integral LED	Red	2ALRMPP4L			
	6V, 12V, 24V, 48V AC/DC					
	110VAC, 110VDC,					
	230VAC, 220VDC					
Integral LED	Please mention the voltage required after the ordering code					
	LED Bulb, BA9S type	Red	2ALMPP4LB			
	24V AC/DC,					
	110VAC, 110VDC					
	230VAC, 220VDC					
LED Bulb	Please mention the voltage required after the ordering code					


















TEKNIC

Control & Signalling Devices 22.5 Ø
METALLIC SERIES

CONTACT ELEMENTS

	TYPE	ORDERING CODE	
	PANEL MOUNTING		
			
	NORMALLY OPEN (NO)	S1	
	SILVER CONTACT		
			
	NORMALLY OPEN (NO)	S1S	
	SILVER CONTACT		
	(BREAK BEFORE MAKE)		
			
	NORMALLY OPEN (NO)	S1E	
	SILVER CONTACT		
	(MAKE BEFORE BREAK)		
			
	NORMALLY CLOSED (NC)	S2	
	SILVER CONTACT		
			
	NORMALLY OPEN (NO)	S3	
	GOLD CONTACT		
			
	NORMALLY CLOSED (NC)	S4	
	GOLD CONTACT		
	BASE MOUNTING		
			
	NORMALLY OPEN (NO)	S5	
	SILVER CONTACT		
			
	NORMALLY CLOSED (NC)	S6	
	SILVER CONTACT		
			
	NORMALLY OPEN (NO)	S7	
	GOLD CONTACTS		
	NORMALLY CLOSED (NC)	S8	
	GOLD CONTACTS		

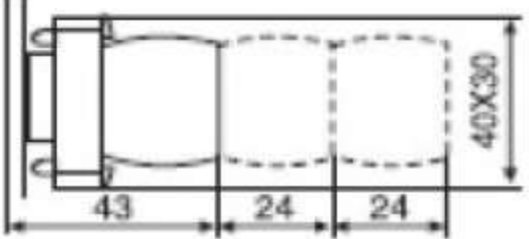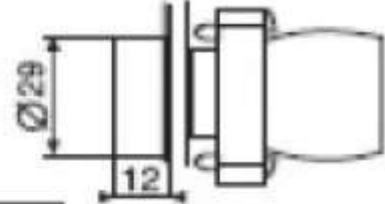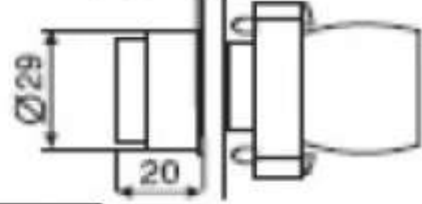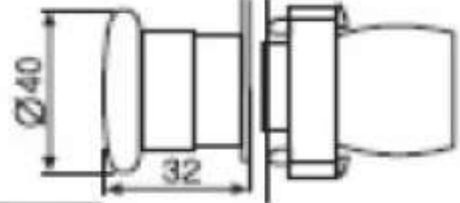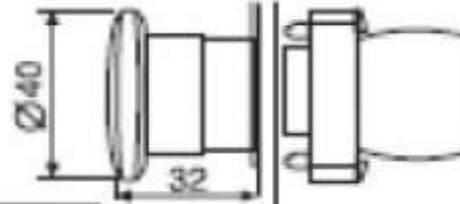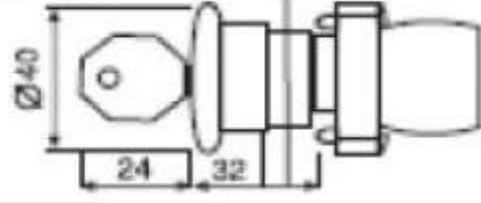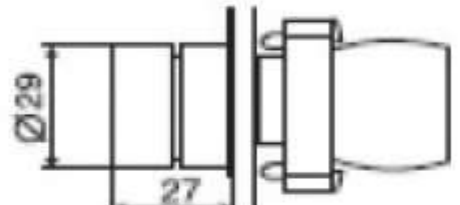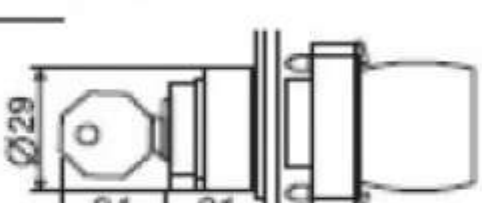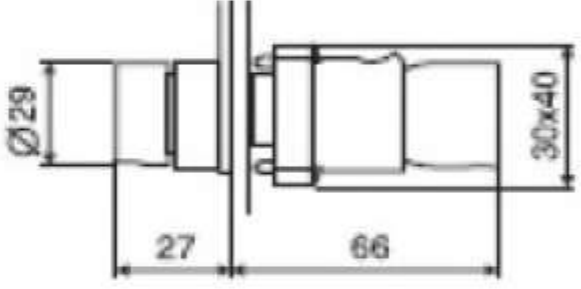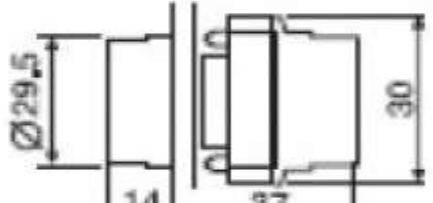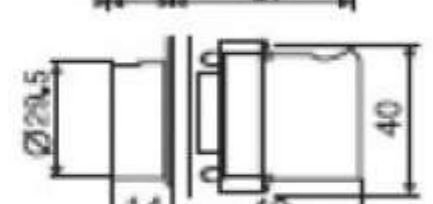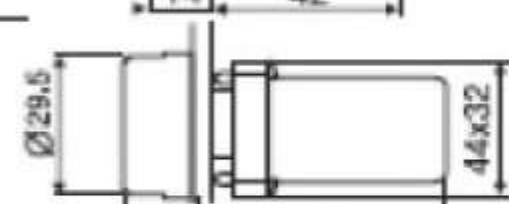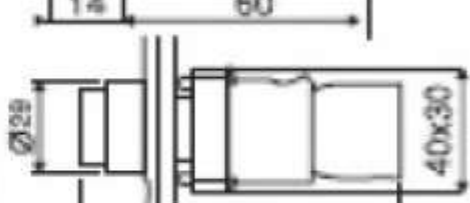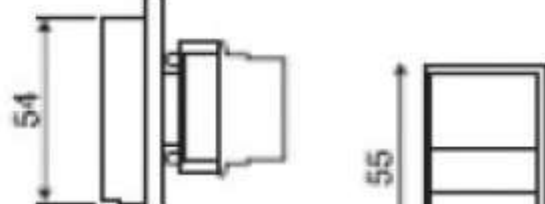Common types of control and signalling devices Ø 22.5

Description	Type of Actuator or Lense Assembly	Colour of Actuator or Lense	Contact Elements NO = S1 NC = S2 or Lamp Holder	Type of complete Control or Signalling Device	
Flush Pushbutton	2AF3	Green	1NO	2PSF310	
	2AF8	Yellow	2NO+1NC	2PSF821	
Projecting Pushbutton	2AP2	Black	2NC	2PSP202	
	2AP4	Red	3NO+3NC	2PSP433	
Mushroom Pushbutton Spring return	2AM2	Black	1NO+1NC	2PSM211	
	2AM4	Red	1NC	2PSM401	
Mushroom Pushbutton latching turn to release	2AML2	Black	1NC	2PSML201	
	2AML4	Red	2NO+2NC	2PSML422	
Mushroom Pushbutton latching, key to release	2AMLKB4	Red	1NO+1NC	2PSMLKB411	
Selector Actuator(2Pos)	2AS2-2P	Black	1NO	2PSS210-2P	
Selector Actuator(3Pos)	2AS2-3P	Red	1NO+1NC	2PSS211-3P	
Key Actuator (2Pos), Key withdrawable in both positions	2AK2-2PB		1NO	2PSK210-2PB	
Key Actuator (3Pos), Key withdrawable in left & right positions	2AK2-3PB		1NO+1NC	2PSK211-3PB	
Selector Illuminated Pushbutton, 2 position with resistance and diode (230V)	2ASLR3-2P230AC	Green	1NO+1NC + 2LHBR230AC	2PSSLR311-2P230AC	
Selector Illuminated Pushbutton, 3 Position with resistance (24V)	2ASLR4-3P24	Red	1NO+1NC + 2LHBR24	2PSSLR411-3P24	
Pilot Light for direct connection upto 130V	2LA3	Green	2LHB24	2PLB324	
	2LA4	Red	2LHB130	2PLB4130	
Pilot Light through resistor and diode for 230 V AC. Bulb:130V.	2LA5	Amber	2LHBR230AC	2PLBR5230AC	
	2LA6	Blue	2LHBR230AC	2PLBR6230AC	
Pilot Light with transformer for 230 V Bulb:24 V.	2LA4	Red	2LHBT230/24	2PLBT4230/24	
	2LA3	Green	2LHBT230/24	2PLBT3230/24	
Flush Illuminated Pushbutton with integral LED for 24 V DC	2ALRF3L24DC	Green	1NO+1NC + 2LHLR24DC	2PSLRF3L1124DC	
Projecting Illuminated Pushbutton with integral LED 230 V AC	2ALRP4L230AC	Red	1NO+1NC + 2LHLR230AC	2PSLRP4L11230AC	
Pilot Light with LED bulb for 110 V Bulb:110 V	2LAL5	Amber	2LHLB110	2PLB5LB110	
Twin Pushbutton marked "I O"	2ATF2-F4-IO	Flush-Black	1 NO	2PSTF210-F401-IO	
Flush - Flush		Flush-Red	1 NC		
Twin Pushbutton not marked	2ATF3-P4	Flush-Green	1NO+1NC	2PSTF311-P411	
Flush - Projecting		Proj-Red	1NO+1NC		
Twin Illuminated Pushbutton marked "I O" Flush - Flush direct connection (130V)	2ATL3-F2-F4 IO130	Lense-Green Flush-Black Flush-Red	2LHB130 1 NO + 1 NC 1 NC	2PSTL3F211-F401-IO130	
Twin Illuminated Pushbutton not marked Flush - Projecting with resistance (24V)	2ATLR5-F3-P424	Lense-Amber Flush-Green Proj.-Red	2LHBR24 1 NO 1 NC	2PSTLR5F310-P40124	